

Please type a plus sign (+) inside this box → 

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. P3316 Total Pages 1

First Named Inventor or Application Identifier

Christopher Clemmett Macleod Beck et al.

Express Mail Label No. EI061741845US

C551095  
09/182745  
8/28/98  
10/28/98

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1.  Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2.  Specification [Total Pages 61]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3.  Drawing(s) (35 USC 113) [Total Sheets 11]
4. Oath or Declaration [Total Pages 2]
  - a.  Newly executed (original or copy)
  - b.  Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
    - i.  DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).
5.  Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

6.  Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a.  Computer Readable Copy
  - b.  Paper Copy (identical to computer copy)
  - c.  Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8.  Assignment Papers (cover sheet & document(s))
9.  37 CFR 3.73(b) Statement (when there is an assignee)  Power of Attorney
10.  English Translation Document (if applicable)
11.  Information Disclosure Statement (IDS)/PTO-1449  Copies of IDS Citations
12.  Preliminary Amendment
13.  Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14.  Small Entity  Statement filed in prior application, Statement(s)  Status still proper and desired
15.  Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16.  Other: .....

## 17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information.

 Continuation  Divisional  Continuation-in-part (CIP) of prior application No: 09 / 151.429

## 18. CORRESPONDENCE ADDRESS

 Customer Number or Bar Code Label : ..... or  Correspondence address below  
 (Insert Customer No. or Attach bar code label here) : .....

NAME	Donald R. Boys - Central Coast Patent Agency Signature- <i>Donald R. Boys</i>			
ADDRESS	P.O. Box 187			
CITY	Aromas	STATE	CA.	ZIP CODE
COUNTRY	United States	TELEPHONE	(831) 726-1457	FAX (831) 726-3475

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL**

Note: Effective October 1, 1997.  
Patent fees are subject to annual revision.

**TOTAL AMOUNT OF PAYMENT** (\$ 872.00)**Complete if Known**

Application Number	NA
Filing Date	NA
First Named Inventor	Christopher Clemmett Macleod Beck et al
Group Art Unit	NA
Examiner Name	NA
Attorney Docket Number	P3316

**METHOD OF PAYMENT** (check one)

1.  The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number   
Deposit Account Name

Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17  Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance

2.  Payment Enclosed:

Check  Money Order  Other

**FEE CALCULATION** (continued)**3. ADDITIONAL FEES**

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.
139	130	139	130	Non-English specification
147	2,520	147	2,520	For filing a request for reexamination
112	920*	112	920*	Requesting publication of SIR prior to Examiner action
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action
115	110	215	55	Extension for reply within first month
116	400	216	200	Extension for reply within second month
117	950	217	475	Extension for reply within third month
118	1,510	218	755	Extension for reply within fourth month
128	2,060	228	1,030	Extension for reply within fifth month
119	310	219	155	Notice of Appeal
120	310	220	155	Filing a brief in support of an appeal
121	270	221	135	Request for oral hearing
138	1,510	138	1,510	Petition to institute a public use proceeding
140	110	240	55	Petition to revive - unavoidable
141	1,320	241	660	Petition to revive - unintentional
142	1,320	242	660	Utility issue fee (or reissue)
143	450	243	225	Design issue fee
144	670	244	335	Plant issue fee
122	130	122	130	Petitions to the Commissioner
123	50	123	50	Petitions related to provisional applications
126	240	126	240	Submission of Information Disclosure Stmt
581	40	581	40	Recording each patent assignment per property (times number of properties)
146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))
149	790	249	395	For each additional invention to be examined (37 CFR 1.129(b))
Other fee (specify) _____				
Other fee (specify) _____				
<b>SUBTOTAL (1)</b>	(\$)		790.00	<b>SUBTOTAL (3)</b> (\$)
* Reduced by Basic Filing Fee Paid				0.

**SUBMITTED BY**

Complete (if applicable)

Typed or Printed Name

Donald R. Boys

Reg. Number

35,074

Signature

Date

10/28/98

Deposit Account User ID

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

**Method and Apparatus for Building Multimedia Applications Using  
Interactive Multimedia Viewers**

*by Inventors*  
*Christopher Clemmett Macleod Beck et al.*

5

**Field of the Invention**

The present invention is in the field of telecommunication encompassing all existing sorts of interaction multimedia technology, and  
10 pertains more particularly to methods and apparatus for providing a seamless viewing and media embedding capability for various types of media interactions that may occur in a multimedia call-center operating a customer-interaction-network-operating-system (CINOS).

15

**Cross-reference to related documents**

20

The present application is a continuation-in-part (CIP) of copending application P3315PA, which is a CIP of copending application P3314PA and P3315PA, all of which are incorporated herein in their entirety by reference.

**Background of the Invention**

25

In the field of telephony communication, there have been many improvements in technology over the years that have contributed to more efficient use of telephone communication within hosted call-center environments. Most of these improvements involve integrating the

telephones and switching systems in such call centers with computer hardware and software adapted for, among other things, better routing of telephone calls, faster delivery of telephone calls and associated information, and improved service with regard to client satisfaction. Such 5 computer-enhanced telephony is known in the art as computer-telephony integration (CTI).

Generally speaking, CTI implementations of various design and purpose are implemented both within individual call-centers and, in some cases, at the telephone network level. For example, processors running CTI 10 software applications may be linked to telephone switches, service control points (SCPs), and network entry points within a public or private telephone network. At the call-center level, CTI-enhanced processors, data servers, transaction servers, and the like, are linked to telephone switches and, in some cases, to similar CTI hardware at the network level, often by a 15 dedicated digital link. CTI processors and other hardware within a call-center is commonly referred to as customer premises equipment (CPE). It is the CTI processor and application software in such centers that provides computer enhancement to a call center.

In a CTI-enhanced call center, telephones at agent stations are 20 connected to a central telephony switching apparatus, such as an automatic call distributor (ACD) switch or a private branch exchange (PBX). The agent stations may also be equipped with computer terminals such as personal computer/video display unit's (PC/VDU's) so that agents manning such stations may have access to stored data as well as being linked to 25 incoming callers by telephone equipment. Such stations may be interconnected through the PC/VDUs by a local area network (LAN). One or more data or transaction servers may also be connected to the LAN that interconnects agent stations. The LAN is, in turn, typically connected to the

CTI processor, which is connected to the call switching apparatus of the call center.

When a call arrives at a call center, whether or not the call has been pre-processed at an SCP, typically at least the telephone number of the

5 calling line is made available to the receiving switch at the call center by the network provider. This service is available by most networks as caller-ID information in one of several formats such as Automatic Number

Identification (ANI). Typically the number called is also available through a service such as Dialed Number Identification Service (DNIS). If the call

10 center is computer-enhanced (CTI), the phone number of the calling party may be used as a key to access additional information from a customer information system (CIS) database at a server on the network that connects the agent workstations. In this manner information pertinent to a call may be provided to an agent, often as a screen pop on the agent's PC/VDU.

15 In recent years, advances in computer technology, telephony equipment, and infrastructure have provided many opportunities for improving telephone service in publicly-switched and private telephone intelligent networks. Similarly,

development of a separate information and data network known as the Internet, together with advances in computer hardware and software have led to a new

20 multimedia telephone system known in the art by several names. In this new

systemology, telephone calls are simulated by multimedia computer equipment, and data, such as audio data, is transmitted over data networks as data packets. In this system the broad term used to describe such computer-simulated telephony is Data Network Telephony (DNT).

25 For purposes of nomenclature and definition, the inventors wish to distinguish clearly between what might be called conventional telephony, which is the telephone service enjoyed by nearly all citizens through local telephone companies and several long-distance telephone network providers, and what has been described herein as computer-simulated telephony or data-network

telephony. The conventional systems are referred to herein as Connection-Oriented Switched-Telephony (COST) systems, CTI enhanced or not.

The computer-simulated, or DNT systems are familiar to those who use and understand computers and data-network systems. Perhaps the best example of DNT is telephone service provided over the Internet, which will be referred to herein as Internet Protocol Network Telephony (IPNT), by far the most extensive, but still a subset of DNT.

Both systems use signals transmitted over network links. In fact, connection to data networks for DNT such as IPNT is typically accomplished over local telephone lines, used to reach points in the network such as an Internet Service Provider (ISP). The definitive difference is that COST telephony may be considered to be connection-oriented telephony. In the COST system, calls are placed and connected by a specific dedicated path, and the connection path is maintained over the time of the call. Bandwidth is basically assured. Other calls and data do not share a connected channel path in a COST system. A DNT system, on the other hand, is not dedicated or connection-oriented. That is, data, including audio data, is prepared, sent, and received as data packets over a data-network. The data packets share network links, and may travel by varied and variable paths.

Recent improvements to available technologies associated with the transmission and reception of data packets during real-time DNT communication have enabled companies to successfully add DNT, principally IPNT, capabilities to existing CTI call centers. Such improvements, as described herein and known to the inventor, include methods for guaranteeing available bandwidth or quality of service (QoS) for a transaction, improved mechanisms for organizing, coding, compressing, and carrying data more efficiently using less bandwidth, and methods and apparatus for intelligently replacing lost data via using voice supplementation methods and enhanced buffering capabilities.

In addition to Internet protocol (IPNT) calls, a DNT center may also share other forms of media with customers accessing the system through their computers. E-mails, Video mails, fax, file share, file transfer, video calls, and so forth are some of the other forms of media which may be used.

5 This capability of handling varied media leads to the term multimedia communications center. A multimedia communications center may be a combination CTI and DNT center, or may be a DNT center capable of receiving COST calls and converting them to a digital DNT format. The term communication center will replace the term call center hereinafter in  
10 this specification when referring to multimedia capabilities.

In typical communication centers, DNT is accomplished by Internet connection and IPNT calls. For this reason, IPNT and the Internet will be used in examples to follow. It should be understood, however, that this usage is exemplary, and not limiting.

15 In systems known to the inventors, incoming IPNT calls are processed and routed within an IPNT-capable communication center in much the same way as COST calls are routed in a CTI-enhanced call-center, using similar or identical routing rules, waiting queues, and so on, aside from the fact that there are two separate networks involved. Communication  
20 centers having both CTI and IPNT capability utilize LAN-connected agent-stations with each station having a telephony-switch-connected headset or phone, and a PC connected, in most cases via LAN, to the network carrying the IPNT calls. Therefore, in most cases, IPNT calls are routed to the agent's PC while conventional telephony calls are routed to the agent's conventional telephone or headset. Typically separate lines and equipment  
25 must be implemented for each type of call weather COST or IPNT.

Due in part to added costs associated with additional equipment, lines, and data ports that are needed to add IPNT capability to a CTI-enhanced call-center, companies are currently experimenting with various

forms of integration between the older COST system and the newer IPNT system. For example, by enhancing data servers, interactive voice response units (IVR's), agent-connecting networks, and so on, with the capability of conforming to Internet protocol, call data arriving from either network may 5 be integrated requiring less equipment and lines to facilitate processing, storage, and transfer of data.

With many new communication products supporting various media types available to businesses and customers, a communication center must add significant application software to accommodate the diversity. For 10 example, e-mail programs have differing parameters than do IP applications. IP applications are different regarding protocol than COST calls, and so on. Separate routing systems and/or software components are needed for routing e-mails, IP calls, COST calls, file sharing, etc. Agents must then be trained in the use of a variety of applications supporting the different types of 15 media.

Keeping contact histories, reporting statistics, creating routing rules and the like becomes more complex as newer types of media are added to communication center capability. Additional hardware implementations such as servers, processors, etc. are generally required to aid full multimedia 20 communication and reporting. Therefore, it is desirable that interactions of all multimedia sorts be analyzed, recorded, and routed according to enterprise (business) rules in a manner that provides seamless integration between media types and application types, thereby allowing agents to respond intelligently and efficiently to customer queries and problems.

25 One problematic issue that is inherent in current art communication centers is that standardization of media viewing capability with respect to agents, business contacts, and customers is virtually happenstance. For example, in order to interact with agents at a current-art communication center, a customer must be operating the proper system with the proper

platform that contains the appropriate software applications and application program interfaces (API's) that are also supported and used at the communication center. For instance, an agent may be using one type of word processing application, while the customer prefers a different word processing application and so on, and the difference may hinder communication. In many instances, complicated conversions may have to be performed on both sides. The same issue applies to many graphics programs, video applications, and even IP applications.

In many instances, customers or contacts are operating different operating platforms or even computer systems i.e. Macintosh vs. IBM. Often such customers or contacts must be segregated from the majority so that they may receive the proper software, that their platform or system supports before they may interact with an agent at the communication center. In most cases their functionality will be limited because often special versions of certain applications may not be available.

Furthermore, agents may desire to perform certain calculations or conduct research that may be directed to streamlining or improving performance. A narrow example of such a researched calculation may be a desire to determine the communication center's top 500 customers in terms of profitability. Such research may be time-consuming and difficult at best, especially in a multimedia communication center. Such communication centers may have many databases wherein variant types of media may be stored. An agent may be required to access media records wherein differing types of programs are required to disseminate the media.

Many organizations offer downloadable software applications termed Viewers in the art, that enable customers or clients to view a particular type of media or format that otherwise the customer or client would not be able to access and use. A drawback to these types of viewers is that they typically support only a few different types of applications at the

most. Therefore, many viewers must be obtained in order to view several differing media types or view media from differing platforms. It is desirable then, to enable designed and dedicated interaction applications adapted to perform certain functions according to enterprise rules. Such applications dedicated to performing predefined processes may be created and made available through a standard application format to help guide customers, contacts and agents through such processes as described above.

What is clearly needed is a method and apparatus for building and providing interactive applications through which customers, clients, agents, business partners and the like may disseminate and view certain material in an application in a media-independent fashion according to a structured and predefined process.

### Summary of the Invention

In a preferred embodiment of the present invention an object-oriented programming interface for use by a programmer, a software Interactive Media Viewer (IMV) module is provided, comprising a code set adapted to access and render media code from multimedia files stored in a data repository; and an editable layer allowing the programmer to program limitations limiting access by the IMV to preselected media files. The IMV further comprises one or more software interfaces to other software modules that may be grouped in an Interactive Media Application (IMA) with one or more IMVs, may be adapted to access and render multimedia code of just one type or more than one type.

In a preferred embodiment the multimedia files stored in the data repository represent multimedia transactions, and are characterized with tags according to one or more of date, time, participants, file type, company affiliation of participants, subject or issue, and relationship to other

multimedia files. In this embodiment IMVs are limited through the editable layer to tags of the multimedia files.

Unique viewers are disclosed and taught according to the limitations above, and a multimedia communications center utilizing such viewers is taught as well.

In another aspect of the invention, in a Multimedia Communication Center environment which includes access to and rendering of multimedia files stored in a data repository, a method is provided for assembling an Interactive Multimedia Application (IMA), comprising steps of (a) selecting first selectable software modules providing functionality for an Interactive Multimedia Application other than access to and rendering of the multimedia files; (b) selecting at least one selectable Interactive Multimedia Viewer (IMV) software module including a code set adapted to access and render media code from multimedia files stored in a data repository and an editable layer allowing the programmer to program limitations limiting access by the IMV to preselected media files; (c) editing the editable layer of the at least one IMV; and (d) joining the selected and edited modules to form the IMA.

In these disclosures, for the first time, a system is provided for quickly and efficiently creating applications for using a multimedia communication center wherein media viewer modules are provided as editable modules wherein access to stored files may be effectively controlled.

### Brief Description of the Drawing Figures

Fig. 1 is a diagram of a multimedia communications center enhanced with a network operating system according to an embodiment of the present invention.

Fig. 2 is a block diagram illustrating basic layers of a customer interaction operating system according to an embodiment of the present invention.

Fig. 3 is a flow chart illustrating basic steps performed by the network operating system of Fig. 2 related to completing interactive transactions between business partners.

Fig. 4 is a block diagram illustrating agent-desktop function according to an embodiment of the present invention.

Fig. 5 is a block diagram of an exemplary WEB-form customer interface according to an embodiment of the present invention.

Fig. 6 is a flow chart illustrating media-presentation and customer-interface logic steps according to an embodiment of the present invention.

Fig. 7 is an exemplary overview of a multimedia interaction storage system within a communication center according to an embodiment of the present invention.

Fig. 8 is a block diagram of the repository of Fig. 7 illustrating threaded text-blocks and their relationship to stored multimedia according to an embodiment of the present invention.

Fig. 9 is a process flow chart illustrating logical steps taken when building a threaded multimedia contact-history of communication-center interactions according to an embodiment of the present invention.

Fig. 10 is a block diagram illustrating an interactive multimedia application (IMA) tool kit and a created application according to an embodiment of the present invention.

Fig. 11 is a process flowchart illustrating logical steps for building an IMA for a user interacting with CINOS according to an embodiment of the present invention.

5

### Description of the Preferred Embodiments

Fig. 1 is a multimedia communications center enhanced with a network operating system according to an embodiment of the present invention. A telephony-network architecture 11 comprises an enterprise-hosted communication center 17 that is linked to, in this example, both a publicly-switched telephone network (PSTN) 13, and a wide area network (WAN) 15, which may be the public Internet or other digital network, such as a company Intranet.

In this particular embodiment communication center 17 handles both conventional telephone calls, which may be categorized as connection oriented switched telephony (COST) calls, and data network telephony (DNT) calls, which may be DNT calls over a private digital network or calls according to a protocol such as the well-known Internet protocol. DNT calls are characterized in that data is transmitted as addressed data packets as opposed to dedicated connections in COST calls. As indicated, PSTN 13 may be a private rather than a public network. WAN 15 may be a company Intranet, the Internet, or another type of WAN known in the art. The particular method of call delivery and call center integration is not particularly relevant for the purposes of this invention. There are many ways known both to the inventor as well as known in the art. Particular issues discussed in the disclosure between the telephones and the computers might be implemented differently depending on the actual system, but shall be deemed equivalent for all purposes of this invention.

100-1000-0000-0000-0000-0000-0000-0000

Incoming COST calls arrive at a network-level telephony switching apparatus 19 in network cloud 13 and are connected over trunk 23 to a central telephony switching apparatus 27 within communication center 17. From switching apparatus 27, calls are routed according to existing routing rules over internal wiring 56 to agents' telephones 47, 49, 51, and 53 residing at agents' workstations 31, 33, 35, and 37 respectively.

5 Incoming DNT calls, and other communication events such as e-mail, file transfers and the like, arrive at a routing node 21 in WAN 15 and are passed on over digital connection 25 to a routing server 29 within 10 communication center 17. Once calls arrive at server 29, they may, in some embodiments, be routed directly over LAN 55 according to existing routing rules to personal computer/video display units (PC/VDU) such as PC/VDU 39, 41, 43, or 45 located at agent's workstations 31, 33, 35, and 37 respectively.

15 In this embodiment, switch-connected telephones 47-53 are also connected to PC/VDU's 39-45 via a headset to computer sound-card according to technique known to the inventor and accomplished via an I/O cable. Thus connected, agents may respond to incoming COST and DNT calls with the same headset.

20 In the exemplary system and communication center shown, the equipment and applications are adapted to provide for multimedia operation at each of the agent stations, so the agents can interact with clients in many different ways, as are known in the multimedia arts.

25 Computer telephony integration (CTI) enhancement is, in this embodiment, provided both at communication center 17 and in PSTN 13. For example, in PSTN 13, a processor 61 running instances of a CTI application known as a T-server (TS) to the inventors, and a statistics server (Stat) is connected to telephony switch 19 via CTI link 65. An intelligent peripheral 59 of the form of an interactive voice response unit (IVR) is

connected to processor 61 via data connection 63. Similar CTI equipment is  
illustrated within communication center 17. Namely, a processor 67  
running instances of TS and Stat and connected to telephony switch 27 via  
CTI link 71, and an IVR 69 connected to processor 67 via a data connection  
5 73, with processor 67 further connected to a local area network (LAN) 55  
within communication center 17.

In alternative embodiments there may also be a CTI processor 22 in  
WAN 15 connected to server 21 by a CTI link 24. Also in some  
embodiments a separate data network 66 connects these CTI processors. In  
10 this way, intelligent routing may be performed at the network level with  
negotiation and direction from within communication center 17.

It will be appreciated by those with skill in the art that the CTI  
enhancements, as immediately described above, may be hosted on one  
processor at PSTN 13 and on one processor at communication center 17  
15 without departing from the spirit and scope of the present invention. The  
inventor has chosen to show separate processors having separate functions  
for exemplary purposes only. It will also be appreciated by the skilled  
artisan that there may be many more or fewer than the four agent stations  
shown in communications center 17, and hardware and software  
20 arrangements may be made in a variety of ways. Also, home agents might be  
connected in a variety of ways to the call center.

In a preferred embodiment of the present invention, a customer-  
interaction network operating system, hereinafter termed (CINOS), is  
provided for the purpose of managing communications center 17, and  
25 optimizing and recording all agent/customer interactions received at  
communication center 17 from networks 13 and 15. CINOS is unique in the  
fact that it is a multi-tiered object-and process-orientated system wherein  
logic regarding the various aspects of its functionality is achieved via  
knowledge-based architecture and object modeling. Various functions of

CINOS, more fully described below, include capturing (recording), analyzing, routing, and, in many instances, responding via automated process to customers engaged in interactions with the enterprise (company hosting the communication center). CINOS is adapted to support all planned communication mediums such as multimedia DNT applications including e-mail, video mail, file transfers, chat sessions, IP calls, and CTI COST transactions such as voice calls, voice mails, faxes, and so on.

Referring back to Fig. 1, CINOS utilizes various LAN-connected machines in order to perform various operations. Among these various hardware implementations are a multimedia server (MIS) 79 adapted to physically store and serve all multimedia transactions, and a customer-information-system server (CIS) 57 adapted to physically store and serve information relevant to customers such as purchase history, financial status, product preferences, contact information, etc. A central server (COS) 77 acts as a host location for a CINOS manager application (noted in text balloon) which is, in effect, the parent application that controls all of the operation and functionality of the system.

In addition to the above-mentioned machines hosting CINOS routines, each PC/VDU such as PC/VDU 39, for example, has a CINOS-agent desktop interface or client application (not shown) adapted to interact with the parent application. Also, each machine that provides particular dedicated function to communication center 17 such as switch-connected CTI processors, IVR's, and other related equipment host instances of CINOS application-program interfaces (API's) to enable seamless integration of differing parameters and/or protocols that are used with various planned application and media types utilized within communication center 17. Such programs may also co-reside or be in any combination or hosted by themselves. Additionally, for performance purposes, additional dedicated network links may exist between those servers, but essentially

they are only performance boosters, and hence for clarity purposes, only a simple network is shown.

As previously described, CINOS comprises a multi-tiered architecture. This unique architecture comprises an external media layer for interfacing with the customer or business contact, a workflow layer for making routing decisions, organizing automated responses, recording transactions, and so on, and an internal media layer for interfacing and presenting interactions to an agent or knowledge worker. An innovative concept associated with CINOS involves the use of toolled process models, knowledge bases, and other object models as base instruction for its various functions. These modular conventions may be inter-bound with each other, and are easily editable providing a customizable framework that may conform to virtually any existing business logic.

In simple operation, and after any network level routing, COST calls and DNT calls including other media events arrive at communication center 17 to telephony switch 27, and routing server 29 respectively. Network level routing, as defined herein, includes any intelligent implementation that may be in place and aided via processors 59, 61, and 22. Load balancing to multiple communication centers, and transferring customer data obtained at network-level over data-network connection 66 would be examples of such network-level routing.

Once a call or other communication event registers at either switch 27 or routing server 29, CINOS immediately identifies the media type associated with the call and begins its processes depending on enterprise rules. For example, a live COST call may first be routed to IVR 69 whereby the customer can be presented with varying choices such as leaving a voice message, waiting in queue, receiving a call back, or perhaps an e-mail, and so on. Interaction by IVR 69, in this instance, will preferably be via voice recognition technique such as is known in the art, but may also be via touch

tone response or other known method. As previously described, the caller may elect from a number of options, such as to hold for a next available agent, select an automated response such as a fax back, or perhaps a later agent-initiated response such as an e-mail or call back. In all cases, CINOS 5 seamlessly processes and executes the logic required to accomplish the goal of the caller in a media and application-independent fashion.

DNT events are handled much the same way as described above for live callers. For example, an IP call may be routed to a digital equivalent of an IVR for interaction or queued for a next available agent, and so on. In 10 one embodiment, IVR 69 may be adapted to handle both COST and DNT interaction.

All interactions with live external media, including actual text-based events whether live or not, are recorded and stored in MIS 79 with an 15 associated text version of the media stored as well, and becoming part of an overall threaded contact history. This is accomplished in varying ways according to existing parameters such as media type, whether the event is a live call, and so on. For example, CINOS may execute a command directing IVR 69 to digitally record an incoming COST call during customer interaction and then store the voice recording of the transaction in MIS 79. 20 A text version of the recording either created simultaneously from the voice recording via voice-to-text techniques (known in the art), or created by a live attendant via manual annotation may be sent to and stored in DB 79. An IPNT call arriving at routing server 29 may be similarly recorded and stored in MIS 79 with an associated text version of the interaction stored in 25 DB 79. E-mails, video calls, voice mails and so on are similarly handled. For example, an incoming e-mail is stored in MIS server 79 while text from the e-mail may be extracted and stored associated with the e-mail.

The purpose of the text version of the event is twofold. Firstly, a complete text-based transaction history of communication center 17 may be

compiled and reserved for later access and audit. Secondly, an agent or knowledge worker may, in some instances, see the text version of the event at the same time that he receives routed notification of the event. In this way, an agent may begin mental preparation before taking a call. The text 5 version of an event must be machine-readable and human readable at times displayed. Interactive media-independent viewers, part of the agent's client application, may be used to disseminate information which may initially not be human readable.

It is important to note here that the text-based version of an event 10 may or may not be a complete and verbatim rendition of an actual media event. For example, an e-mail may contain many documents each having many pages of text. Therefore, the text-based version of a particular e-mail event may simply contain the name and particulars regarding the author, a purchase order, and a list of the enclosed documents by title, and basic 15 content or memo as well as a possible manual annotation. The attachments to the e-mail may be stored separately, and be also cross-indexed and retrievable. Seeing the purchase order when the event is routed to an agent desktop tells the agent that this e-mail is important.

A fax, stored originally as a bit-mapped document, may be 20 converted to text in the system via optical recognition (OCR) technique wherein sometimes only certain content such as the authors contact information, basic intent of the fax, and perhaps special numbers or codes contained in the original fax are recorded in a text version 79 , sometimes the whole text is OCR'd, while the original fax is stored in it's entirety in 25 DB 79. Such codes or numbers that are specifically parsed from actual media may be part of a unique coding system set up by the enterprise whereby customers are directed to include such codes or numbers with their orders, service requests, and so on.

01234567890  
12345678901234567890  
23456789012345678901234567890  
34567890123456789012345678901234567890

5                    Parsing text messages is accomplished via a text-analyzer known to the inventor. In other non-text media types, such as video or graphics, descriptive notes may be taken via live attendant and stored in DB 79 as previously mentioned. Voice recognition technology may also be used in a  
10                  case of recorded sound or video with sound. All transactions regardless of media type are thus recorded and stored according to enterprise rules with at least a meaningful part of the content if not all of the content of such transactions converted to text and stored in DB 79 associated with the recording of the event. Again, the importance of the text version is that the  
15                  extracted knowledge of the transaction therein is in machine-operable code, allowing search and cross-referencing functions that may otherwise not be possible.

15                  After incoming events are analyzed and processed with regards to queuing, recording, storing, etc. CINOS decides the disposition paths of each event. For example, live calls in queue are routed to live agents if available, if this is the priority action in the enterprise rules. E-mails are either routed to next available agents using a push technology, or simply stored in MIS server 79 where they may be retrieved by agents after receiving notification. Recorded events such as IVR voice requests are  
20                  stored in MIS server 79 where they may be retrieved by agents, and so on.

25                  By the use of routing and routing notification events, any media may be routed to an appropriate agent based on skill, or any other rule-based routing method over LAN 55. Actual multimedia events may be accessed from MIS server 79 at the agent's discretion, or by rule, and text-based versions of those events stored in DB 79 may be mirrored and routed to the agent along with notification of the incoming event.

                        Other services may be performed by CINOS such as responding to media requests without agent participation via initiating automated fax responses, out-bound dialing campaigns wherein recorded information is

given to a customer perhaps concerning an order placed by the customer, and so on. Networking via business or chat applications between several business partners, customers, agents, and so on, is possible wherein each entry may be stored in DB 79 as part of a discussion thread including responses of another media type, perhaps initiated by a communication-center agent to one of the participants during the discussion.

As a general rule, full multimedia storage is done in a mass storage server, and linked by cross-indexing to the database. Depending on the business model, full text or only partial annotation is stored in the database, or a mix therof, e.g by media type.

In addition to supporting a wide variety of applications and protocol, CINOS is provided with the tools for building media-independent self-help wizards that are adapted for problem solving and reduction. Similarly, external and internal interaction media viewers are provided and adapted to support any media of choice.

CINOS uses object modeling and linking techniques that are known in the art to effect much of it's goal of presenting a seamless customer interaction with an enterprise agent or knowledge worker operating in a communication center such as center 17. For example, an interaction object model (IOM) represents a transcript of all interaction history stored in DB 79 and provides an audit trail of the state of transactions of all interactions. An interaction process model (IPM) controls how events are handled within the operating system.

An additional set of models handle how agents receive their routed media such as via traditional push model, blended push model, publish and subscribe model, or interrupt model. Prioritizing interaction events may also be accomplished through varying the push theme or scheme. For example, traditional push technology for e-mail means that only e-mail (media type) is being worked on by an agent. By blending the push model

with a publish and subscribe model, the interrupt model is created wherein the agent may subscribe to various routed media such as answering phones, and responding to faxes, but may be interrupted for an important interaction of another media type such as e-mail and so on. In this way an agent's time  
5 may be utilized according to enterprise rules within an automated environment.

Outbound campaigns may be configured according to enterprise rules and media preference using a single rule-set knowledge-base. This single set of outbound tools can be used to initiate customer dialog via  
10 predictive dialing, e-mail push, automated recorded messages, and so on.

It will be apparent to those with skill in the art that common object modeling (COM) can be used to create virtually any type of model for any type of enterprise situation. It is the intention of the inventor to provide the applicable control codes known in the art for building process and object  
15 models and enabling the linking and interaction between the models. As previously described, it is partly the fact that CINOS uses these various models and knowledge bases to achieve desired interaction that sets it above current-art systems. The inventor knows of no such network interfacing operating system that is based on the above described technology.

20 CINOS may be implemented in a number of different topologies. For example, CINOS may be implemented as a centralized topology with one communication center as shown here in Fig. 1, a distributed topology wherein a single communication center may span multiple physical locations, a segmented communication center wherein a single pool of  
25 agents services more than one company or customer base, or a wide communication network wherein a plurality of communication centers such as center 17 cooperatively service a common pool of customers or a customer base. Enterprises involved in commerce such as large financial institutions hosting many geographically separate communication centers

may build their entire networking system using CINOS architecture in  
standardized and distributed fashion. There is no limitation to the type of  
enterprise that may use CINOS as it may be tooled to accommodate  
virtually any network architecture linked to a communication center having  
5 DNT capability.

It will also be apparent to one with skill in the art that CINOS  
routines according to various embodiments of the present invention may be  
included and implemented at the network level without departing from the  
spirit and scope of the present invention such as in processor 61, and IVR  
10 59 in PSTN 13, or in routing node 21 in WAN 11.

Fig. 2 is a block diagram illustrating basic layers of the network  
operating system according to an embodiment of the present invention. As  
previously described with reference to Fig. 1, CINOS comprises three basic  
operating layers. They are an external media layer 83, a workflow layer 85,  
15 and an internal media layer 87. External media layer 83 interfaces directly  
with the customers or business contacts or partners as illustrated via  
customers a and b, and business contact c. The bi-directional arrows  
beneath each of the above mentioned participants illustrate interactive  
participation with CINOS on the customer side.

External media layer 83 may, in one embodiment, be a multifaceted,  
20 web-based self-help interface providing news information and a host of  
other services that may be personalized by the customer. In many respects,  
external media layer 83 in this embodiment is similar to a web browser.

Workflow layer 85 comprises 3 basic function categories beginning  
25 with a content analysis category 89 wherein textual analysis, voice analysis,  
IVR interaction, recording and storing takes place. A next category is  
context resolution 91. Context resolution involves customer identification,  
business process binding, preparation for routing, and so on. A third  
category termed interaction routing 93 comprises various processes

associated with the presentation of the interaction to agents, service persons, knowledge workers, business partners, customers and the like, that is, all transaction partners. Category 93 covers queuing, skill-based routing, automated treatment, workflow models, and so on.

5 Internal media layer 87 comprises an agent desktop interface not shown in Fig. 1, but described in more detail below. Both external layer 83 and internal layer 87 contain the required tools for enabling media and application-independent interfacing such as previously mentioned self-help wizards, media viewers, and other controls as prescribed via enterprise 10 rules.

Internal media layer 87 provides an agent with, among other options, information about the customer or contact, information about current or historical business processes, information about current interactions and their relationship to business processes, and a knowledge-base to guide the 15 agent or knowledge worker with interaction response and workflow. An agent a, and agent b, and a knowledge worker c are shown herein interacting with the system as illustrated via bi-directional arrows. The skilled artisan will recognize these are merely examples, and there may be many more such persons, and interactions in some instances may be routed to machines for 20 response.

It will be apparent to one with skill in the art that the multi-tiered architecture of CINOS such as is illustrated herein may comprise many more or differing steps or processes without departing from the spirit and scope of the present invention.

25 Fig. 3 is a flow chart illustrating basic steps performed by the interaction operating system of Fig. 2 related to completing a transaction between a customer and an agent, wherein the transaction is initiated by the customer. Similar steps may be accomplished in the opposite direction for communications initiated by an agent, as the system is bi-directional, but the

present example will serve to teach the inventive aspects of the system. In step 95, an incoming transaction, such as a live call, an e-mail, etc. , is received at the appropriate CTI switch (COST) or routing server (DNT) in a CINOS communication center such as center 17. In step 97, customer and media type are identified and interaction proceeds.

All transactions, whether live calls, such as video calls, DNT calls and COST calls, or text-based documents, such as e-mails, are recorded and stored in one or more mass storage devices handled by one or more database applications. This may be taken as server 79 of Fig. 1, although the diagram of Fig. 1 is exemplary.

A principle object of the invention is to extract maximum information from every transaction for building a knowledge base that can be used for dynamic management and future analysis and development. This is done primarily by data mining, which is applicable to machine-operable code, that is text. Because of the nature of the extraction, there is a difference in the way live calls and text-based media is handled.

Discrimination as to the text nature of the media is made at step 99. If the media chosen by the customer is already text-based, then the transaction is recorded as received (101), and a data mining application extracts important information in step 103 and stores it in the knowledge base. The distinct portions and versions of the transaction, such as the originally recorded version and any extracted data are related to one another and to other knowledge previously stored, and become part of a threaded interaction history associated with an ongoing interaction and ultimately of an overall contact history.

If the media chosen by the customer is determined in step 99 to be a live interaction such as a COST or IPNT call, then the existing knowledge base is accessed at step 107, and the call is routed to the best fit agent. This may, of course, be done in a number of ways, such as an ADC, skill-based

routing as known to the inventors, transfer to an IVR for automatic processing, and so on, as may be dictated by enterprise rules. If routing is to an agent, customer information may be retrieved from CIS server 57 (Fig. 1) and sent to the agent's PC, and appropriate scripts may be provided to guide

5 an agent in interacting with the caller.

In step 109 the actual transaction is recorded as it takes place, which, in the case of live calls, may be a video or an audio recording or a combination of both. Preferably the recording is digitized.

In step 111, a maximal text version is prepared from the actual

10 transaction. The ability to do so depends to a degree on the sophistication of the system. This process may be as simple as a person adding notes for annotation or as sophisticated as a voice-to-text application preparing a full text version as the transaction transpires.

In step 113 the text version is mined for data and resulting

15 knowledge is stored in the appropriate knowledge base for future use, and added to overall record with appropriate cross-referencing.

It will be apparent to one with skill in the art that there will be many routines comprising various steps for performing different processes as may be determined by enterprise rules which may likewise vary depending on,

20 among other considerations, company type, product and or service type, communication center architecture, whether or not the system architecture is centralized or distributed, and so on. The embodiment taught herein is meant only as a basic example of process functionality related to CINOS processing of an incoming event.

25 Fig. 4 is a block diagram illustrating agent-desktop function according to an embodiment of the present invention. An agent-desktop client 115, part of the CINOS overall architecture, enables an agent or knowledge worker to configure and control his or her interface to the rest of the system and to external media. Client 115 may be personalized

according to a particular agents parameters. A desktop interface 117 may appear and function much like a personalized web-browser containing many similar attributes related to network capabilities including full multimedia function, software tool kits, linking and embedding capability, and so on.

5 An HTML client application 119 oversees all of the network capability previously mentioned. In this embodiment for example, HTML client 119 communicates with an Internet information server 121 using HTTP protocol which is standard. Client 119, if provided minimally, may be used in conjunction with an Internet browser for full multimedia 10 function. In some embodiments, it may be maximally provided to be a fully featured client with full web browser function. For example, an agent may create and edit web forms, web pages, embed controls into such web-based forms or pages to provide certain customer interaction mechanisms in addition to having a fully functional navigation tool at his disposal.

15 In another embodiment, Server 121 may be a server on a private network or corporate WAN instead of an Internet server. In a preferred embodiment, however, any number of servers on the Internet and/or linked to a WAN other than the Internet may communicate with client 119 as it intended to support all existing and known communication protocols.

20 A windows client 123 is provided to seamlessly integrate existing applications on the agent's PC to network applications and processes. This may be implemented via a desktop tool-kit 125 that contains all of the required controls for building, integrating and customizing the interface.

25 A business-logic layer comprises business object models 129, hereinafter termed business objects 129, representing contacts, interactions, knowledge-bases, events, routing processes, and other system routines. Integration and interaction of the various described desktop components with these logics is accomplished via common object modeling (COM) which is known in the art and available to the inventor. Desktop to CTI

integration is accomplished via controls provided or created with a CTI set of tools or tool kit (not shown). For example, if the enterprise desires to blend voice and e-mail, the CTI tool kit would be used to build and integrate the interface.

5 Existing network applications such as CIS, enterprise resource planning (ERP), Commerce, and the like interact with various business objects using COM and may also interact with a physical database using ODBC and SQL.

10

### Customer Interface Media Window

According to a preferred embodiment of the present invention, CINOS access by customers of an enhanced multimedia communication center, such as center 17 of Fig. 1, is controlled by means of a customer-facing media interface, by which customers may be identified and even categorized according to numerous criteria. In some cases access may be controlled through subscription, or according to other qualifying criteria such as may be deemed appropriate by the enterprise. For example, if the enterprise is an exclusive investment club, membership may be required. Categorizing criteria may include demographic information such as income level, credit history, or any other attribute that may be quantified and used to categorize a customer.

An enterprise-controlled access point may be defined as an interfacing window or portal created and maintained at a typical customer entry point in a network as may be known in the art. Such interfaces may take the form of a WEB-based customer interface (a WEB page), an interactive voice response (IVR) unit, a service control point (SCP), or some other customer-facing system or apparatus as may be known in the art.

15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95

For the purposes of this specification, an example of an enterprise-controlled WEB-form access and interface window is illustrated as an example for a preferred embodiment. The inventor deems such an interface to be most adept in offering best-fit media options while remaining accessible to a large customer or client base.

Fig. 5 is a block diagram of a WEB-form customer interface according to an embodiment of the present invention. WEB form 133, hereinafter termed access window 133, is provided to be a part of an enterprise's WEB page which may be accessed through Internet connection and navigation, as is known in the art. Window 133 is part of the CINOS software architecture described above, and represents the initiation of any customer interaction with the hosting enterprise. A WEB counter 143 is provided and records the number of visits to window 133.

Window 133 is built and edited using COM codes available to the inventor and typically found in tool kits adapted for the purpose of creating interactive displays on a WEB page. Such a tool kit may be located on an agent's desktop, perhaps part of an agent's HTML client such as client 119 of Fig. 4. In one embodiment, it may be part of a system administrator's tool kit.

Window 133 contains interactive options directed at various categories and functions. For example, a new client section 135 contains interactive options related to adding a new client to the active customer base of the enterprise. A customer service section 137 contains interactive options presented to existing clients needing service. A new order section 139 contains interactive options presented to existing clients wishing to do new business.

Each offered interactive option is an embedded executable function having the appropriate links to other system areas of CINOS such as may be

relevant to the immediate interaction such as to services offered, routing routines, database searching, interaction recording, and so on.

An innovative function of window 133 is to provide front-end control of access to the enterprise by existing and potential clients/customers. For example, as a client, contact, or potential client interacts with the various media and functional options presented by the enterprise in window 133, he or she is being directed according to enterprise rules in such a way that he or she may first be qualified or not to patronize the enterprise. Secondly, the contacting person may be categorized and sorted as to type of qualified customer. Thirdly, the person contacting person may be directed to pre-selected media options by the enterprise for various services offered including but not limited to routing live interactions, and so on.

In a preferred embodiment of the present invention, access window 133 is fully customizable, based on customer data and enterprise rules with the focus of such customization directed toward benefiting the enterprise and ultimately the client. That is, the client's options within window 133 are pre-selected and preferred by the hosting enterprise based in part on data about the client, details about the client's communication equipment and software, and enterprise rules and constraints. In some embodiments, the client may aid in customizing window 133. However, as it is desired by the enterprise to provide service in a cost-effective manner, the client will be presented with options as preferred by the enterprise in most cases.

To further illustrate, refer now to new client section 135. If window 133 is part of the enterprise WEB page, as is the case with this example, there will be a variety of visitors which may or may not be pre-qualified by the enterprise. Therefore, an interested party would begin (and be restricted to) taking a new client survey, illustrated as one of the options in section 135. If the enterprise rules require this as a first step, then the other options

may be enabled only upon completion of the survey. By choosing new client survey, a second window may contain various survey options such as via e-mail, interactive voice recording, type and send method, or the like.

Information taken in the client survey is recorded and entered into a 5 CINOS database such as DB 75 of Fig. 1. Such information may also be compared against enterprise rules or constraints, and other known information as may be available to the enterprise. Assuming the client is now recognized by the enterprise, the client's media hardware and telephony information may be recorded for future interaction purposes. Such 10 information may include the client's personal computer parameters including modem type, Internet connection type, computer platform type, type of Internet phone application installed, etc. Similarly, COST telephone parameters may be recorded, such as personal phone number, business phone number, cellular phone number, forwarding numbers, and so on. 15 Such data will influence latter customization of his personal window 133 for the particular client including the types of media that will be offered.

Finally, the client may be asked to create a password for the purpose 20 of accessing CINOS. A section 141 is provided containing a network log-in option along with download sections for obtaining permanent and or temporary software as may be desired or needed, or, in some cases, required for the client to access certain services, view certain content, and so on.

Section 137 presents media options for clients seeking customer 25 service from the enterprise. These options are, in a preferred embodiment, presented in a customized or personalized fashion within the client's window 133 as was described above. Therefore, each client patronizing the enterprise may access a version of window 133 that differs in look and functionality than that of another client. In this example, service section 137 contains options for e-mail, chat program, fax program, a self-help wizard, and a voice wizard. Other media types may be added or subtracted

50 55 60 65 70 75 80 85 90 95

from the client's window 133 depending on any of several criteria. Personalization of widow 133 takes into account client information as stored in CINOS database 75, service-agent media availability and preferences, and perhaps any overriding enterprise rules. Unless and until a 5 client is identified there are typically no options presented to the client for continuing a transaction with the enterprise.

For an identified client, by selecting the e-mail option, the client's preferred e-mail program may be activated for the purpose of sending a message to or soliciting a reply from a service agent. By selecting chat 10 program, the client may be launched into a scheduled service seminar featuring many clients interacting with a service expert regarding a certain subject. One enterprise rule regarding section 137 may be that there is no telephone or I-phone media option for customer service for a client in the absence of an ongoing project with the particular customer. In this sense an 15 ongoing project includes any unfinished business that the client is involved in with the enterprise.

Self-help wizards and voice wizards as illustrated in section 137 may be offered to help a client resolve an issue without taxing further resource. Such wizards may be customized based on a client's recorded 20 data, perhaps confirming past interactions, providing account or order status, and so on. In some embodiments, selecting an option might avail several additional options. For example, selecting chat program may avail three possible chat programs to choose from with different schedules, content, and functionality attributed to each individual program.

25 New order section 139 in this example contains various options adapted to facilitate placing orders. The options as illustrated herein include, but are not limited to, I-phone, call back, promotional models, video presentations, an on-line viewer, and an order wizard. Interaction is the same as was stated with regards to section 137. For example, selecting

promotional models, accesses a database containing the current promotional information and features of products which may be viewed interactively by the client using an on-line viewer offered as one of the functional options (tool). The options presented in the New Orders section may also be 5 customized according to client identity, demographics, transaction history, and enterprise rules.

On-line viewers may enable the client to view documents that are not supported on his computer platform. Selecting video presentation may avail several types of videos for viewing ,such that the client may choose 10 one. If the client does not have a viewer installed on his computer which will support the offered video, perhaps the on-line viewer may play the video, or the client could download a temporary viewer from section 141, etc. Selecting call back may bring up a second array of media choices made available by the enterprise for receiving a reply interaction from an agent.

15 By providing a controlled interface window such as window 133 the enterprise may control routing and interaction right from the beginning of customer contact. Through the innovative method of linking and reporting to other CINOS functions, and repositories, much real-time personaliation 20 of window 133 according to enterprise rules and customer parameters may be made automatically. For example, if a client's history indicates a propensity toward frequent buying, an I-phone option may be presented in customer service section 137 in his window 133 immediately after such a determination so that he may get direct customer service at all times.

25 Certain media options, as described above, may be afforded a certain priority over one another regarding interaction with the enterprise. For example, a VIP client may have live interactive media choices offered in window 133 such as I-phone, call back to COST phone, video phone, etc. A client known for infrequent contact or troublesome interactive history may be limited to text-based interaction such as e-mail and so on.

As an integral part of CINOS functionality, window 133 acts as a portal through which existing and potential clients may be screened, categorized and routed according to enterprise rules. Customer interfaces such as window 133 may be provided at various locations on a WAN such as the Internet without departing from the spirit and scope of the present invention. Such portals may exist in different geographic regions, and may be created for differing customer bases such as one for Latin America, and one for the pacific rim, and so on. Instances of CINOS routine may be distributed widely over a network.

Although the example provided herein is of a WEB form, it will be apparent to one with skill in the art that a CTI counterpart may be created for the COST telephony network. Such a case may be a CINOS enhanced IVR at an SCP or customer access point in the COST network.

CINOS, as previously described, optimizes customer/agent interaction in a manner which is economical and cost efficient to both the enterprise and the patronizing client. The customer interfacing window as taught herein with regards to Fig. 5 is innovative in that it is a fully customizable portal that facilities seamless integration between clients and enterprise agents according to enterprise rules. Further innovation is evident in that client data is fully and seamlessly integrated with CINOS intelligence and enterprise rules regarding routing of interactions and other constraints or limitations that are programmed into the system. In effect, logic from the front end, or customer side, to the back end or agent side is linked and accessible to all appropriate CINOS routines which include applicable CTI CINOS routines. The various customer interfacing logic is explained more fully below in a series of process logic steps in a flow chart.

Fig. 6 is a flow chart illustrating media-presentation and customer-interface logic steps according to an embodiment of the present invention.

In step 145, a visitor registers at an enterprise's WEB page. The visitor is identified according to enterprise rules in step 147. In step 148 CINOS determines the current status of the visitor after searching known client and contact data records. For example, the visitor may be a potential new client, 5 an existing client, or an existing business contact. Although not specifically illustrated, a potential or new-business-client is not typically logically separated from a potential new-client until further process ensues in step 149 with regards to qualification via survey.

If the visitor wishes to be a client, he may log-in to the network 10 system in step 159. Log-in may be automatic in the event that CINOS remembers the client's assigned password, or perhaps typing the password or other code may still be required for security reasons. At the time of log-in, window 133 is presented in personalized fashion according to client data and enterprise rules in step 161. In step 163, interaction between an 15 enterprise entity and the client begins with a media type that is offered by the enterprise and selected by the client. An enterprise entity, as immediately described above, is herein defined as an agent, knowledge worker, service person, or any other live attendant, as well as any entity constituting an automated response action such as an automated fax, an 20 IVR, automated file downloads, etc.

At step 148, if it is determined that the visitor is new, then a new 25 client survey is conducted in step 149. Step 149 will determine if the new visitor is a client or business contact via the survey process. As described with reference to Fig. 6, the client survey may be conducted using a variety of known techniques and media. Presuming that a new visitor qualifies as a client or business contact in step 149, he or she may be asked to create a password in order to provide access to CINOS. In step 153, the client's appropriate communication and system parameters are recorded for future reference and for use in customizing window 133.

At step 155, a client instance of CINOS, or perhaps another enabling application, may be presented for download by the client. In some embodiments, there may be no required software for download. Therefore, step 155 may be considered optional in this regard. In step 157, the new 5 client may log-in to the network system and begin interaction. Because the client, in this case, is accessing the system for the first time, the steps wherein he would obtain a customized window and begin interaction with an enterprise entity are not shown as intermediate configuration of media choices, product preferences, and the like, may still be required before a 10 customized interface may be presented. In one embodiment, the client may not see a customized window until the next time he or she attempts to access the network.

15 Steps 165, 167, and 169 for an existing business contact as determined in step 148 are similar to steps 159, 161, and 163 for an existing client although the rules for interaction such as media used, personnel involved and so forth will be different. For example, in step 167 an existing business contact may be offered the option of using a network-collaboration program wherein I-phone, file sharing, video conferencing and the like are inherent to that one application.

20 It will be appreciated that there are many possible logic sequences or steps that may be followed in interfacing and enabling interaction between a client and an enterprise entity without departing from the spirit and scope of the present invention. Fig. 6 presents just one possible example of many.

25 It will be apparent to one with skill in the art that the rules governing the types of media offered to clients may be based on a combination of variables such as may be decided upon by the enterprise without departing from the spirit and scope of the present invention. Likewise, offered media types may be added or withheld from a client over a period of time based on such variables. Moreover, such additions or subtractions of media

availability with regards to customer interface window 133 may be automated and based on calculated variables.

In one embodiment, a client may add or subtract media choices if desired, however, the enterprise may reserve the right not to engage such media if added by a client.

In one embodiment, special application-independent media viewers such as the viewer offered in section 139 of window 133 of Fig. 5, are offered to clients and possessed by agents so that initial illegible information may be made human readable regardless of the authoring application used by the agent or the client in the process of interaction.

### **Rules-Based Storage and Threading of Multimedia Interactions**

In a preferred embodiment of the present invention, all CINOS controlled interactions with customers or business contacts are recorded and stored in a contact history comprising a MIS database and a text database such as were described with reference to copending application P3313PA, and described above. That is, actual multimedia interactions are recorded to one database or to a section of one database supporting all multimedia types used in the communication center, and text-based versions are stored in another database or portion of the same database. All of the actual recorded transactions and text versions are related as a threaded contact history which may be separate from or part of the same database as will be further explained below.

Fig. 7 is an exemplary overview of a multimedia-interaction storage system within a communication center according to an embodiment of the present invention. A system architecture 171 is illustrated solely for the purpose of providing just one of many possible architectures in which the methods and apparatus of the invention may be practiced. Architecture 171,

which in a preferred embodiment comprises both conventional and DNT apparatus, is exemplary of an architecture that could facilitate CINOS according to an embodiment of the present invention such as is also the case of Fig. 1

5 At the heart of the storage system is a mass-storage repository 187 adapted to store multimedia interactions as well as text-based related files. Repository 187 may utilize any form of digital storage technology known in the art such as Raid-Array, Optical Storage, and so on. The storage capacity of repository 187 will depend directly on it's implementation with regard to 10 the size of the communication center and predicted amount of data that will be stored and kept by the system.

15 In this example, repository 187 is divided logically into two sections. One section, multimedia information system (MIS) 189, is responsible for housing all multimedia interactions defined as media that is not text-based such as audio, video, and graphics-based media. All multimedia interactions are stored in MIS 189 whether incoming, outgoing, or internal. A second section, herein referred to as text section 191 is responsible for all 20 text-based interactions as well as text versions related to non-text files. Sections 191 and 189 of repository 187 are analogous to MIS 79 and DB 75 of Fig. 3.

25 Repository 187 is connected to a communication-center local area network (LAN) 195. Repository 187 is accessible via LAN 195 to authorized personnel within a communication center such as agents, knowledge workers, or the like, and may, in some instances, also be made available to clients communicating with the call center. A network router (RTN) 175 is shown connected to LAN 195 via network connection 203. In this example, network router 175 is the first point within a communication center wherein DNT media arrives. Network router 175 is exemplary of many types of routers that may be used to route data over LAN 195. An

Internet-protocol-network-telephony (IPNT) switch 176 is connected to network router 175 via data link as is known in the art. IPNT switch 176 further routes or distributes live IPNT calls that do not require routing to a live agent. IPNT calls that are routed to live agents are sent over connection 5 203 to LAN 195 where they reach agent PC/VDU's (not shown) or DNT-capable phones (not shown) as illustrated via directional arrows.

An object of the present invention is to record all multimedia interactions and store them in MIS 189. A further object of the present invention is to similarly record text versions of and text files related to all 10 multimedia interactions and to store them in text-based section 191. For the purpose of the present invention, a text version of a non-text file is defined as a sufficient text rendition or description of a corresponding multimedia interaction. Still another object of the present invention is to provide an innovative mechanism wherein authorized persons may access any 15 particular block of text and if desired, call up the actual media to which the text relates.

More detail regarding the order and manipulation of repository 187 is described further below.

Creating text-based versions of live multimedia interactions may, in 20 some cases, be accomplished via an automated method. For example, a digital voice attendant 197 is provided and linked to IPNT switch 176. Digital voice attendant 197 may be of the form of a DNT-capable IVR or other digital voice-response mechanism as may be known in the art. Such automated attendants may interact with a voice caller instead of requiring a 25 live agent. A speech to text converter 199 is provided and linked to voice attendant 197. As digital voice attendant 197 interacts with a caller, speech to text converter 199 uses voice recognition technology to convert the audio speech to text. Such text may then be stored automatically into text section 191 and related to the also-recorded audio data.

It will be apparent to one with skill in the art that as speech  
recognition technologies are further improved over their current state, which  
is adequate for many implementations, reliable text versions of audio  
transactions are not only possible but practical. Such speech to text  
5 conversions are used here only for the convenience of automation wherein  
no live attendant is needed to transcribe such audio data. The inventor is  
familiar with such converters as used in the CINOS system according to a  
preferred embodiment. Such converters provide convenience in the practice  
of the present invention but are not specifically required to achieve the  
10 objects of the present invention.

Manual transcription may also be used to convert audio/video to text  
or code that may then be entered into text section 191. For example, a live  
attendant 201 is shown connected to LAN 195. Attendant 201, in this case,  
15 may be given the responsibility of transcribing audio files from speech to  
text and annotating video or graphics files for the purpose of creating text  
files related to the non-text data. One or more live attendants such as  
attendant 201 may be provided for this purpose. Some media arriving at a  
communication center such as the one represented via architecture 171 will  
already be text-based and therefore require no conversion or annotation.  
20 Short e-mails, Faxes, word documents, and so on are part of this media  
category.

An automated services system 193 is illustrated as having a direct  
connection to section 191 of the data repository. System 193 is provided for  
certain text-based interactions, as described above, wherein a complete text  
25 record of the interaction may be mirrored, or otherwise created and stored  
into text section 191. Such automated services may include but are not  
limited to automated e-mail and fax systems. For example, a fax may be  
sent and mirrored into section 191 or, perhaps recreated using an optical  
character recognition (OCR) technique and then entered. Physical text-

documents such as legal papers and the like, may be automatically scanned into text section 191 before they are sent to clients. There are many possible automated techniques for entering text files into a database. Such methods described with regards to automated services 193 are a convenience in  
5 practicing the present invention but are not specifically required to achieve the objects of the present invention.

With respect to the dual capability (COST/DNT) of architecture 171, a central telephony switch 173 is provided to be a first destination for COST calls arriving from, for example, a PSTN network. Switch 173 may be a  
10 PBX, ACD, or another known type of telephony switch. Internal COST wiring 182 connects telephony switch 173 to agent's individual telephones (not shown). Switch 173 is enhanced via a processor 179 running an instance of T-server and an instance of Stat-server, which are software enhancements known to the inventor and have been previously described.  
15 Such enhancements provide CTI applications, such as intelligent routing, but are not specifically required to practice the present invention. CINOS as previously described is adapted to be integrated with such software when present in a CINOS enhanced communication-center.

An intelligent peripheral in the form of a COST IVR 177 is provided  
20 for the purpose of interacting with callers seeking information and the like who do not require connection to a live agent. IVR technology may comprise voice response, touch tone interaction, or a combination of these technologies. IVR 177 is linked to processor 179 and also to automated services 193. An example of an IVR interaction may be the presentation to  
25 a caller of options for using an automated service such as those described above, or perhaps waiting for a live agent.

A CTI to DNT interface 181 is provided for the purpose of converting COST interactions to digital mode compatible with DNT so as to be adapted for digital storage and interaction according to CINOS

functionality and enterprise business rules as described above. Interface 181 is not specifically required to practice the present invention so long as appropriate application programming interfaces (API's) are provided for equipment that interfaces with CINOS. Bi-directional arrows illustrated 5 between interface 181 and IVR 177 represent the ability to route interactions in either direction. COST to DNT conversion may be accomplished in IVR 177 in addition to or in place of interface 181. The connection architecture presented herein is exemplary only.

A speech to text converter 185 is provided for converting audio from 10 the CTI side to text for entering into text section 191 as was taught with regards to converter 199 on the DNT side. Actual recorded media interactions are illustrated entering MIS 189 after text versions are rendered and entered into section 191, however, this is not required. In some 15 instances text versions of multimedia interactions may be rendered after the interaction is stored. There is no limitation regarding sequence. It is sufficient to say that converters 185 and 199 are capable of real-time conversion and entry.

Server 183 shown connected to LAN 195 is adapted to host a 20 CINOS MGR.(operating system) application which provides control and organization with regard to various functions provided by the CINOS system as a whole. The storage architecture represented herein by element 171, and all it encompasses in this embodiment, is meant only to be an example architecture as may be dedicated to the storage and organization of communication-center data according to enterprise rules.

25 A unique method termed multimedia threading by the inventor is used in a preferred embodiment of the present invention for relating each multimedia interaction whether incoming to, out going from, or internal to the system, such as between an agent and a supervisor. This innovative process allows agents or other authorized personnel to access text data and

ability cross-reference the data to actual recorded multimedia interactions which may be displayed and played back.

Fig. 8 is an illustration of a relational diagram as might be displayed on a display monitor, representing entities stored in the databases described.

5 The blocks of Fig. 8 illustrate threaded text-blocks and their relationship to stored multimedia according to an embodiment of the present invention.

Repository 187 comprises section 191 and 189 as illustrated in Fig. 7.

Section 191 contains text versions of interactions that are related by such as chronology, issue, participants, company affiliation, and the like. The text documents and versions of non-text files, represented in this case by icons, are shown related by serial position. For the sake of clarity regarding the innovative threading according to an embodiment of the present invention, a brief description of prior art threading follows.

10 Threaded dialog as is known in prior art involves a system of strings or threads that are identified as being inherent to a single entity or subject matter wherein the dialog (questions and replies) is about that subject or about a question or subject that an entity has brought forth. A threaded dialog may be finite dialog (is closed at some point) or it may be ongoing. Typically, a thread, which connects or associates the pieces of dialog, 15 contains all of the dialog in the order that it happened such as in chronological order. Threading may be implemented based on other criteria 20 as may be appropriate for a particular situation or by particular rules.

25 As previously described with reference to the background section, prior art threading techniques are confined to text such as with an on-line message board or the like. The inventor knows of no system that supports full multimedia interaction. The innovative implementation taught below integrates the text-based thread with stored multimedia interactions such that one may interact with the thread and access various stored media associated with the thread.

Referring again to Fig. 8, a customer 205 is illustrated as having two threads. They are issue I and issue II. Customer 205 has an assigned number XX-XX that identifies him or her with respect to the CINOS system. Issues I and II may comprise sales dialog, purchasing dialog, or any other type or purposed dialog as may be generic to the hosting enterprise.

5 Customer 205 may well be a business contact, or even an internal agent practicing dialog with a supervisor or the like.

A series of icons 225-239 represent the type of media stored for each text block (text not shown). For example, issue I comprises first an e-mail text followed by a fax text, WEB text, and V-phone text. In this case, a time stamp or other known method may be used to insure that each text block is in order. Icons 225-239 are interactive pointers or links to the actual media interactions that they represent. That is, the first block of e-mail text is associated with an interactive icon, in this case icon 225. By clicking on the icon a with a pointer device, the actual e-mail may be accessed and viewed. In an alternative aspect, not only the actual transaction may be presented to a user for review, but related files may also be listed or otherwise presented for selection and review.

A logical link 207 represents cross-referencing capability between sections 191 and 189. Dialog may be threaded according to a wide variety of business rules. For example, a thread or string may represent dialog about a customer, product, agent, group of agents, group of customers, and so on. An identifier is assigned to an entity and to all the communication events to or from that entity, or those in which the entity may have been involved such as a group discussion or chat. In this way all interactions may be organized and stored accordingly.

In one embodiment, keyboard commands could be used to cross-reference to actual media instead of icons. In another embodiment, text versions of actual media are fully viewable with the text itself appearing in

interactive form whereupon a double click may call up the associated media and so on. There are many variations within the scope of the invention.

Although actual recorded media interactions are, in this embodiment, stored in MIS 189, there does not have to be two separate databases (one for text and one for actual media). All data may reside in one database and be sectioned in storage. For example, one click on the customer name may bring up text only, while a double click on the text brings up the associated media.

In MIS 189, recorded multimedia interactions are represented by icons 241-247 and 251. For example element 241 represents all recorded Video phone interactions. Element 243 represents all e-mails. Element 245 represents all recorded COST interactions. Similar associations are made with respect to elements 247 and 251 which represent WEB interactions and Video mails respectively. WEB interactions 247 may include on-line orders, requests, information forms, signed certificates, and so on.

Element 249 represents additional stored multimedia files dedicated to, for example, promoting the enterprises products or services. Promotional files 249 may comprise files of the form of any enterprise supported multimedia. These files may be tools that can be sent to clients upon request or perhaps periodically.

Referring again to section 191, element 227 located on the thread labeled issue I represents text from a fax. Because a fax is text-based and not a multimedia interaction, there is no corresponding media event associated with it. However, the fax is threaded into the dialog according to, in this case, chronological order. A short example of a proposed dialog concerning issue I follows.

Element 225 represents an e-mail sent by customer 205 to the enterprise requesting pricing information. An enterprise agent responds with a fax 227 to customer 205 containing the requested information.

Customer 205 then places an on-line order (element 229) along with a request for confirmation via video phone (element 231). Issue I may be closed at this point. Issue II may represent a threaded dialog concerning company service with regards to the customer order of issue I, or perhaps an agent-to-manufacturer dialog regarding how the order was handled with respect to issue I.

In accordance with CINOS functionality as previously taught in descriptions above, data may be mined from repository 187 for the purpose of enhancing service to customer 205. Mined data may be used to affect routing of interactions, product promotions or advertisements that may be sent to customer 205. In some cases, mined data may effect new dialog with a customer or business contact resulting in new thread additions. A complete contact history with interactive linking to actual recorded media enables the enterprise to resolve disputes more easily, better service the customer, and enhance profitability for the enterprise.

Fig. 9 is a process flow chart illustrating logical steps taken when building a threaded multimedia contact-history of communication-center interactions according to an embodiment of the present invention. Logical process steps as illustrated herein are meant to represent just one of many sequences which may be implemented when building a multimedia-threaded contact-history. Actual steps will depend on enterprise rules. In step 209, a current interaction to be recorded is identified. Identifiers may include special passwords or codes for identifying the contacts involved with the interaction. The media type of the interaction is identified in step 211. If the media type is already text-based, as confirmed in step 213, then the interaction is prepared for entry into a database such as section 191 of Fig. 8. Preparation may include such automated processes as scanning, mirroring, file conversions, and so on. Manual annotation via live attendants such as attendant 201 of Fig. 7 may also be performed. In step

223, the text interaction is entered into section 191 of repository 187 and takes it's place along the associated dialog thread according to enterprise rules.

5 If the interaction is of the form of non-text media as identified in step 211, then the MIS section of repository 187, or section 189, is notified to accept the input. At step 219, the non-text interaction is recorded into section 189 of repository 187. This may occur in real time as the interaction takes place, or some point after the media interaction was recorded.

10 In step 221, a text version of the recorded media or a text-based document related to the transaction is rendered for storage into section 191 as part of the thread. In some instances, as described with reference to Fig. 7, step 221 is automated via speech to text converters and occurs at the same time or before the recorded multimedia interaction is entered into section 189. In other instances, text versions of multimedia interactions may be 15 rendered after the recorded interaction is stored. A live attendant such as attendant 201 of Fig. 7 may be assigned to parse video and or audio for applicable text. Such parsed text is entered into section 191 and takes it's place along the thread as was described above.

20 In all cases, an identifying medium is used to assign portions of an ongoing dialog to the proper location along a thread as well as provide identification to actual recorded media for cross-referencing such as may occur during a system audit or contact review. Further, the appropriate icons and or links are created and associated to entered text wherein actual multimedia may be cross-referenced in interactive fashion. Hence, the type 25 of media may be readily identified by an auditing or reviewing agent simply by browsing the threaded text with accessibility to the recorded events made by interactive method such as clicking an icon with a pointer device as was previously described. As an additional benefit all of the threaded dialog, whether text based or not, is rendered in a form that data mining may be

S65047 Change 16.0

used to create many useful relationships and to derive much useful information from the stored data.

It will be apparent to one with skill in the art that the order and specific function of logical steps as taught herein may vary according to the 5 type of enterprise, existing enterprise rules, and so on. For example, instead of threaded dialogs being inherent to a specific customer with the dialog being about the customers interactions, it may be specific to a particular agent with the dialog about the agents activities. Such differences in thread assignment may be incorporated into one rules-based repository.

10

### Interactive Multimedia Viewers and Applications

In a preferred embodiment of the present invention, CINOS users comprising such as customers, agents, and business associates are provided 15 with innovative multimedia applications that are containers for dedicated multimedia viewers enabling a particular user to perform a dedicated function or functions including gaining access to and viewing media from selected areas of CINOS data storage. Provision of such applications allows any objective to be gained regarding virtually any aspect of the enterprise.

20 These interactive applications are built from a parent application or container that may contain all of the interactive modules that may be desired to effect a specific application to be presented to a user having a need for such an application.

According to various embodiments of the present invention, which 25 are described below, the multimedia applications may be adapted for such tasks as placing orders, previewing products, determining customer profitability, calculating sales volumes, reviewing agent performances, or any other enterprise-conceived objective. The abilities and constraints applied to these unique applications are limited only by the imagination, and

PCT/US2013/043763

tools available to an authorized programmer or worker, such as a knowledge worker, who creates the applications.

Fig. 10 is a block diagram illustrating an interactive multimedia application (IMA) tool kit and a diagram of a created IMA application according to an embodiment of the present invention. An IMA tool kit 225 is provided to an authorized programmer, which may be a knowledge worker, for the purpose of creating special multimedia applications such as an IMA 239 (illustrated within tool kit) for users of CINOS, wherein users may access and interact with certain pre-selected data for the purpose of reaching decisions and performing certain dedicated objectives as may be defined by enterprise rules. IMA tool kit 225 contains executable codes or modules represented as building blocks by the inventors. These modules may be used by themselves for certain functions, or may be linked to each other to provide additional function in a programmed order. A good example of such a module would be a combination of COM codes used to build an interactive graphical interface (module), and the like.

Among these functional modules are interactive media viewers (IMV's) 227 which are provided and adapted for viewing certain media supported by the enterprise hosting a communication center employing CINOS. Supported media types may include but are not limited to telephony (traditional or IP), interactive voice response (IVR), e-mails, WEB embedded interfaces or forms, faxes, chat programs, multiparty threaded discussions, etc. IMV's 227 are unique in the fact that they are dedicated viewers including an interactive layer that enables a programmer to impose selective control over access to multimedia files in a data repository by the programmed IMV. For example, CINOS users may be assigned an identification code or number which will also be tagged to all of their stored interactions as described elsewhere above with reference to Fig. 9. These codes may be used to associate individuals with limitations and

constraints from viewing media that is not part of their own contact history (for example). Other limitations or constraints may also be applied to IMV's 227 as may be conceived and implemented by a programmer such as playing or viewing interactions of certain dates, playing or viewing interactions about certain subjects, and so on. An editable software layer inherent to each viewer enables a programmer to build such constraints and selective functionality into a particular viewer, and to add the edited viewer to an IMA.

Application Program Interfaces (API's) 229 are provided to allow a user to send obtained data or calculated results to connected peripheral devices or software modules or applications as may be required for operations such as printing, faxing, sending over a network, etc. If it is desired by enterprise rules, for example that a customer be able to print certain text or graphic information obtained through IMA 239, then the appropriate interface may be provided.

Database Access Modules (DAM's) 231 are provided for allowing access to normally restricted databases that may be connected to CINOS architecture. Such databases will of course include multimedia information systems (MIS), customer information systems (CIS), which may also include contact and agent associated data, external databases such as may be hosted by the enterprise, and so on. Constraints may be applied to DAM's 231 pertaining to which and or what portions of certain databases may be accessed by an application.

Programming language modules 233 are provided and adapted to facilitate the type of platform/system that an IMA such as IMA 239 will be created for. One IMA such as IMA 239 may be adapted to run on a variety of system types and platforms. System platform modules are provided as API's for intended supported system/platform combinations. Mathematical function modules (MFM's) are provided and adapted to interact with

00000000000000000000000000000000

CINOS databases for the purpose of performing pre-selected calculations such as cost averaging and so on.

In this particular embodiment, IMA 239 is a finished application ready to be distributed. IMA 239 contains default display modules (not shown) for the purpose of enabling computer screen display on a user's system as is known in the art. IMA 239 may be stored in a special applications server (not shown) connected to the CINOS network either at WAN level or at the level of the hosting communication center. The method of distribution for IMA's such as IMA 239 may be of the form of a WEB-based client presentation to a user such as in customer window 135 of Fig. 5, for example. IMA 239 may also be of the form of a browser plug-in accessible via a server such as may be the case with a special applications server as described above. In other instances, such applications may be made a part of an agent's desktop and so on. There are many and varied possibilities.

In this particular embodiment, which is exemplary only, IMA 239 is of the form of an interactive purchase guide for bulk paper products as illustrated via underlined title. IMA 239, in this example, is logically separated into two distinct operations or functions. These are operation 241 and operation 243. Operation 241 is a product preview interactive guide, while operation 243 is an order guide. The number of operations built in to an IMA such as IMA 239 will depend upon the intended purpose of the application according to enterprise rules.

For exemplary purposes, assume that IMA 239 which is, in this case, a purchase guide for bulk paper products, is to be presented to a corporate buyer who is new on the job. Because he is new, he may be uncomfortable with his own knowledge of how much or what kind of paper to buy. His predecessor may have a long purchase history with the enterprise. Therefore, he requests an IMA such as IMA 239 that will allow him to

preview products, browse the past purchase history of his predecessor, and perform a calculation that averages, by month, the last years paper purchases made by his company.

According to enterprise rules, IMA 239 adheres most closely to the  
5 buyer's request. That is, It allows for preview of products (241), and leads  
the buyer toward an order (243). IMA 239 may, in some instances, be  
designed specifically for one buyer if it is determined that his level of  
business contribution warrants it. However, in most cases, IMA  
applications such as application 239 will be more generic with interchange  
10 between different users accomplished with some editing performed based  
upon the intended use of the application and user parameters.

A communication center may provide a number of standard IMA's  
with each IMA adapted to a different objective. A communication center  
may also provide custom-built MIAs for any specific purpose. A certain  
15 amount of editing ability renders one IMA usable in more than one  
situation.

Referring now to IMA 239, as previously described, operations 241  
(product preview) and operation 243 (order guide) are available and related  
to purchasing bulk paper products. Operation 241 begins by presenting two  
20 different platform options from which a user may select. A platform A may  
be a Windows platform, and a platform B may be a UNIX platform. There  
may be more or fewer options regarding platforms. Similarly, applicable  
modules such as may be generic to a certain platform are installed with each  
platform. In this way, one application may be run on differing platforms.

25 An API, labeled as such, shown logically connected beneath  
platforms A and B is illustrative of an interface for linked modules  
depended on platform choice. A database module (DAM) is first logically  
connected to the API module previously described. The DAM controls  
which database or databases may be accessed by IMA 239. A window

shown immediately beneath the DAM provides an edit interface wherein the author or programmer may insert additional constraints, such as allowing access to only certain database sections and so on.

A mathematical function module (MFM) labeled as such is shown beneath, and logically connected to the edit window. MFM is adapted to allow prescribed mathematical operations to be performed relative to database information such as cost averaging, grouping by product preference, and so on. Various modules as have been described herein may bring up additional displays on a user's computer if the module in question offers a choice of operation or returns readable results. Furthermore, standard preview modules (not shown) may be presented as object models and invoke standard viewers such as may be installed on the user's computer system.

An interactive media viewer block (IMV) shown logically connected to MFM, allows the user to view pre-selected media interactions that are persistently stored in a database such as MIS 189 of Fig. 7. The IMV block shown may represent a plurality of unique IMVs or a single IMV. In this case three IMVs are involved, and these are represented by the blocks labeled TXT (text), VID (video), and AU (audio). Each individual IMV has an edit layer wherein a programmer may apply limitations or constraints relative to viewing capability. In some cases the same limitations may be applied to all the IMVs of an application in one editing sequence, such as by doing one edit and copying that edit to other IMVs. Although there are three illustrated viewer modules that make up the IMV in this example, more or fewer viewer modules may be used depending upon the intended use of IMA 239 and enterprise rules.

Although not explicitly shown, each IMV is editable through a software layer. In this way, a user may be limited to viewing certain media interactions and transactions that are allowed via enterprise rules. For

example, TXT viewer may only be able to view e-mails from the user and agent in a specific interaction thread, but not intermittent e-mails on the thread that may be from agent to agent or supervisor to agent and so on.

Because each interactor with CINOS has an identification, and all

5 interactions from or to them are so identified, these identifiers may be used in the edit layer of each viewer to constrain the user. In this way, a user may be granted access to a history database and view only his interactions without imposing on other users who share the system. Likewise, agents or supervisors charged with the task of reviewing the activities of certain other agents may use applications such as IMA 239, adapted for the stated  
10 purpose, and be constrained in terms of whose interactions (agent's) may be viewed, and so on. In this manner full use may be provided to specialized users without exposing otherwise sensitive information that is not pertinent to the user or the purpose of the IMA.

15 Operation 243 created to allow a user to place an order for products is, in this case, a logical close for the previous operation. A module labeled Media Options may present standard media choices that the enterprise accepts for placing an order such as IP phone, e-mail, and so on. A connected text module (TXT) allows the user to send a quick text order while on-line. A send button sends a completed order to the enterprise.  
20

It will be apparent to one with skill in the art that an IMA such as IMA 239 may be programmed for virtually any enterprise objective without departing from the spirit and scope of the present invention, such as those already described. By utilizing pre-built modules instead of writing codes  
25 line-by-line, programmers may greatly increase the efficiency of application preparation and presentation to users. In many cases only slight editing is required to present a new application to a particular user. By using COM, and other known conventions such as Java, applications are quickly assembled or modified as has been taught herein.

Fig. 11 is a process flowchart illustrating logical steps for building an IMA for a user interacting with CINOS according to an embodiment of the present invention. The process described below is meant to be just one example of many differing processes that may be implemented when 5 building and customizing an IMA such as IMA 239 of Fig. 10. The process components and order of which they are assembled will depend largely upon the type and purpose of the application being assembled and enterprise rules.

In step 238, the programmer or application author opens his tool kit. 10 Such a tool kit may be part of tool kit 125 of Fig. 4 on a CINOS desktop interface. In step 240, the author sets system and platform parameters. That is, he inserts the proper functional modules for use of the application on specific platforms and or system types. For example, the author may set up one application to run on more than one platform or system such as IBM 15 and Macintosh. It should be noted here that if more than one type of system is supported in one application, then the associated modules will need to be included as well.

In step 242, the author selects a programming language module containing libraries of known programming languages and codes. As 20 known in the art, there are different programming languages used for different platforms. The author, in addition to building with pre-assembled modules, or building blocks, may have to write certain functional code in the supported language. In a preferred embodiment, the author has access to these language libraries from within his tool kit.

25 In step 245, database access module(s) (DAMs) are selected and inserted. As previously described with reference to Fig. 10, these modules will determine which and what portions of databases may be accessed. In an alternative embodiment these restrictions may also be a part of the editable layer of IMVs. Step 247 covers mathematical functions relative to

selected databases. Mathematical function modules (MFM's) allow a user to perform pre-defined operations. MFM's may or may not be needed in an IMA. This step may be omitted if no such functions are requested by a user or otherwise required in an application.

5        In step 249, interactive media viewers (IMV's) are created using viewer modules adapted to view certain media of the type that stored interactions comprise. An IMV is a module that may comprise one or more than one media viewer. Each of these viewer modules are editable (via software layer) and may function alone or as a component of a larger 10 module (comprising more than one viewer).

10        In step 251, closing modules are inserted to complete the application. For example, order modules are one example of a closing modules. Modules adapted to return displayed results would be another example. Moreover, peripheral device API's may be inserted to allow 15 results to be printed, faxed, sent over the network, etc. In this way, a supervisor reviewing the performance of a group of agents may report to other concerned parties such as managers, enterprise board members, or the like.

20        The example as illustrated herein is basic but is deemed adequate by the inventor for illustration of one typical IMA building sequence. The description and order of steps may vary considerably.

25        IMA's such as IMA 239 are transportable over a network and may be stored on a special applications server at network level, or within the communication center. In some embodiments, user's will be connected to the Internet when using IMA's allowing CINOS access. In other embodiments, agents may access CINOS resources while working off-line with respect to the Internet. In such cases, logging on to CINOS is still required.

It will be apparent to one with skill in the art that IMA 239 as taught herein is interactive and displayable on a PC/VDU that is logged into CINOS through a WAN. However, this is not specifically required to practice the present invention, but rather preferred. Other embodiments 5 may include presenting a CTI interface such as an IVR wherein a user may interact with the application via voice or touch tone response.

In still another embodiment, such applications may be presented via external media such as on a floppy disk(s) or CD-ROM wherein a user may, by inserting the disk or CD, obtain the ability of accessing the enterprise via 10 WAN, gaining access to CINOS, and performing an objective with the IMA.

It will be apparent to one with skill in the art that CINOS may be implemented in a single communication center, or in a plurality of communication centers linked via WAN without departing from the spirit 15 and scope of the present invention.

It will also be apparent to one with skill in the art that rules may be created which govern access to CINOS without departing from the spirit and scope of the present invention. For example, customers may be required to subscribe to CINOS, and may also be provided with a customer application 20 enabling such access. In another embodiment, access may be given to the general public according to established security rules governing commerce, financial transactions, and other processes.

There are many existing and future implementation opportunities for an interaction operating system such as CINOS many of which have already 25 been stated. The spirit and scope of the present invention is limited only by the claim that follow.

What is claimed is:

1. In an object-oriented programming interface for use by a programmer, a software Interactive Media Viewer (IMV) module, comprising:

- a code set adapted to access and render media code from multimedia files stored in a data repository; and
- an editable layer allowing the programmer to program selective control of access by the IMV to the multimedia files.

10

2. The IMV of claim 1 wherein the IMV further comprises one or more software interfaces to other software modules that may be grouped in an Interactive Media Application (IMA) with one or more IMVs.

15

3. An IMV as in claim 1 wherein the IMV is adapted to access and render multimedia code of one type.

4. An IMV as in claim 1 wherein the IMV is adapted to access and render multimedia code of more than one type.

20

5. The IMV of claim 1 wherein the multimedia files stored in the data repository represent multimedia transactions, and are characterized with tags according to one or more of date, time, participants, file type, company affiliation of participants, subject or issue, and relationship to other multimedia files, and wherein IMVs are limited through the editable layer to tags of the multimedia files.

6. A programming application for creating an Interactive Multimedia Application (IMA) which includes access to and rendering of multimedia files stored in a data repository, comprising:

5        first selectable software modules providing functionality for an Interactive Multimedia Application other than access to and rendering of the multimedia files; and

10      at least one selectable Interactive Multimedia Viewer (IMV) software module including a code set adapted to access and render media code from multimedia files stored in a data repository and an editable layer allowing the programmer to program selective control of access by the IMV to the multimedia files;

15      wherein by selecting, including, and editing software modules the programmer is enabled to create the IMA.

20      7. The programming application of claim 6 wherein the IMV further comprises one or more software interfaces to the first selectable software modules.

8. A programming application as in claim 6 wherein the IMV is adapted to access and render multimedia code of only one type.

25      9. A programming application as in claim 6 wherein the IMV is adapted to access and render multimedia code of more than one type.

10. The programming application of claim 6 wherein the multimedia files stored in the data repository represent multimedia transactions, and are characterized with tags according to one or more of date, time, participants, file type, company affiliation of participants, subject or issue, and

relationship to other multimedia files, and wherein IMVs are limited through the editable layer to tags of the multimedia files.

11. A multimedia communication center, comprising:

5                   an access interface for outside communication;  
an interface to communication center personnel;  
a storage system for recording multimedia transactions in a data  
repository, the stored transactions characterized by tags representing one or  
more of date, time, participants, file type, company affiliation of  
10                participants, subject or issue, and relationship to other multimedia files; and  
A programming application for creating an Interactive Multimedia  
Application (IMA) which includes access to and rendering of the  
multimedia files stored in the data repository;  
wherein the programming application is characterized by first  
15                selectable software modules providing functionality for an Interactive  
Multimedia Application other than access to and rendering of the  
multimedia files, and at least one selectable Interactive Multimedia Viewer  
(IMV) software module including a code set adapted to access and render  
media code from multimedia files stored in a data repository and an editable  
20                layer allowing the programmer to program selective control of access access  
by the IMV to the multimedia files, wherein selecting, including, and  
editing software modules the programmer is enabled to create the IMA.

12. The multimedia communication center of claim 11 wherein the IMV

25                further comprises one or more software interfaces to the first selectable  
software modules.

13. A multimedia communication center as in claim 11 wherein the IMV is  
adapted to access and render multimedia code of only one type.

14. A multimedia communication center as in claim 11 wherein the IMV is adapted to access and render multimedia code of more than one type.

5        15. A multimedia communication center as in claim 11 wherein the multimedia files stored in the data repository represent multimedia transactions, and are characterized with tags according to one or more of date, time, participants, file type, company affiliation of participants, subject or issue, and relationship to other multimedia files, and wherein IMVs are 10 limited through the editable layer to tags of the multimedia files.

16. In a Multimedia Communication Center environment which includes access to and rendering of multimedia files stored in a data repository, a method for assembling an Interactive Multimedia Application (IMA),

15 comprising steps of:  
selecting first selectable software modules providing functionality for an Interactive Multimedia Application other than access to and rendering of the multimedia files;

20        selecting at least one selectable Interactive Multimedia Viewer (IMV) software module including a code set adapted to access and render media code from multimedia files stored in a data repository and an editable layer allowing the programmer to program limitations limiting access by the IMV to preselected media files;

25        editing the editable layer of the at least one IMV; and  
joining the selected and edited modules to form the IMA.

17. The method of claim 16 wherein the IMV further comprises one or more software interfaces to the first selectable software modules.

18. The method of claim 16 wherein the IMV is adapted to access and render multimedia code of only one type.

19. The method of claim 16 wherein the IMV is adapted to access and render multimedia code of more than one type.

20. The method of claim 16 wherein the multimedia files stored in the data repository represent multimedia transactions, and are characterized with tags according to one or more of date, time, participants, file type, company affiliation of participants, subject or issue, and relationship to other multimedia files, and wherein IMVs are limited through the editable layer to tags of the multimedia files.

### **Abstract of the Disclosure**

A programming application for creating an Interactive Multimedia Application (IMA) which includes access to and rendering of multimedia files stored in a data repository has first selectable software modules providing functionality for an Interactive Multimedia Application other than access to and rendering of the multimedia files, and at least one selectable Interactive Multimedia Viewer (IMV) software module including a code set adapted to access and render media code from multimedia files stored in a data repository and an editable layer allowing the programmer to program limitations limiting access by the IMV to preselected media files. In the programming application a programmer, by selecting, including, and editing software modules the programmer is enabled to create the IMA. IVRs may access and render code of one multimedia type or more than one type, and are adapted to interact with other software modules in an application.

Multimedia files stored in the data repository represent multimedia transactions, and are typically characterized with tags according to one or more of date, time, participants, file type, company affiliation of participants, subject or issue, and relationship to other multimedia files, and IMVs are limited through the editable layer to tags of the multimedia files.

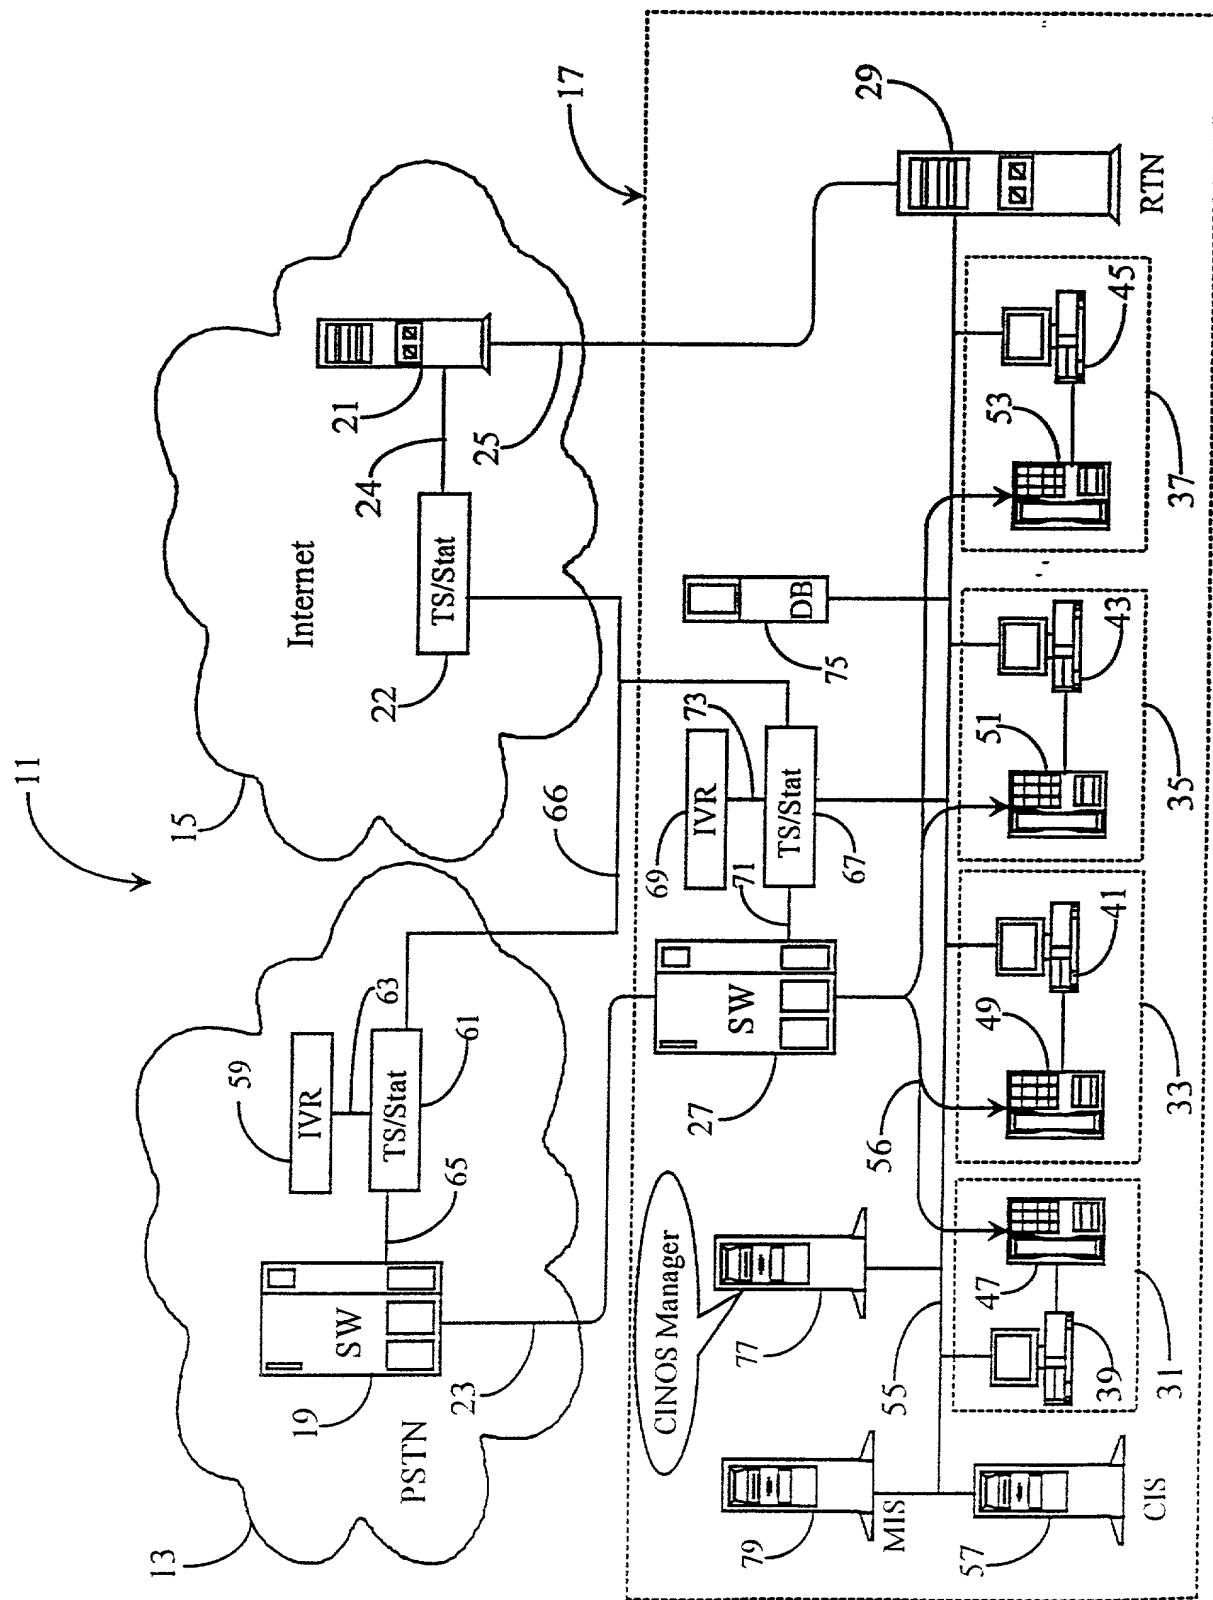


Fig. 1

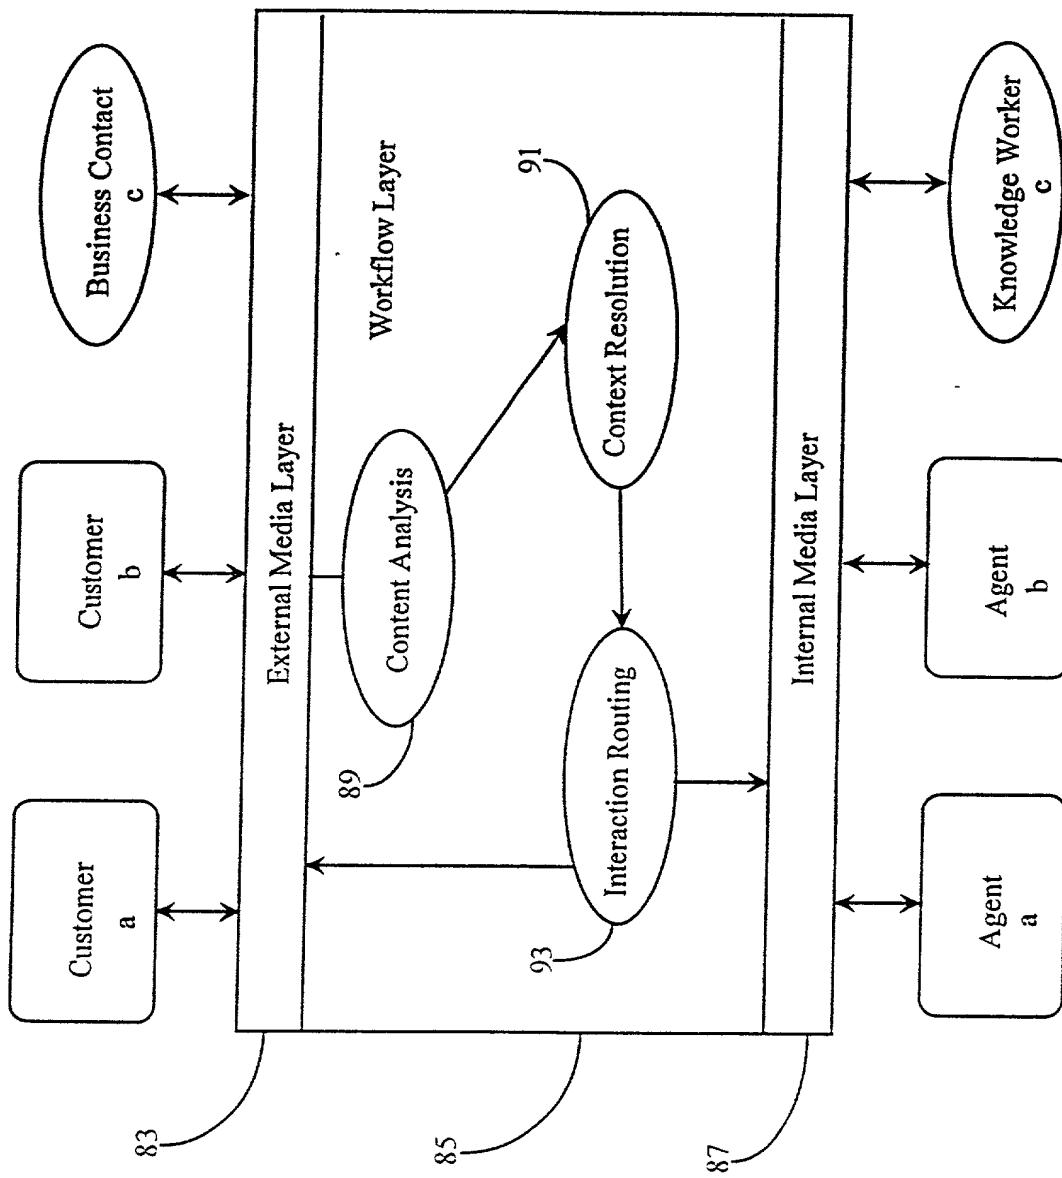


Fig. 2

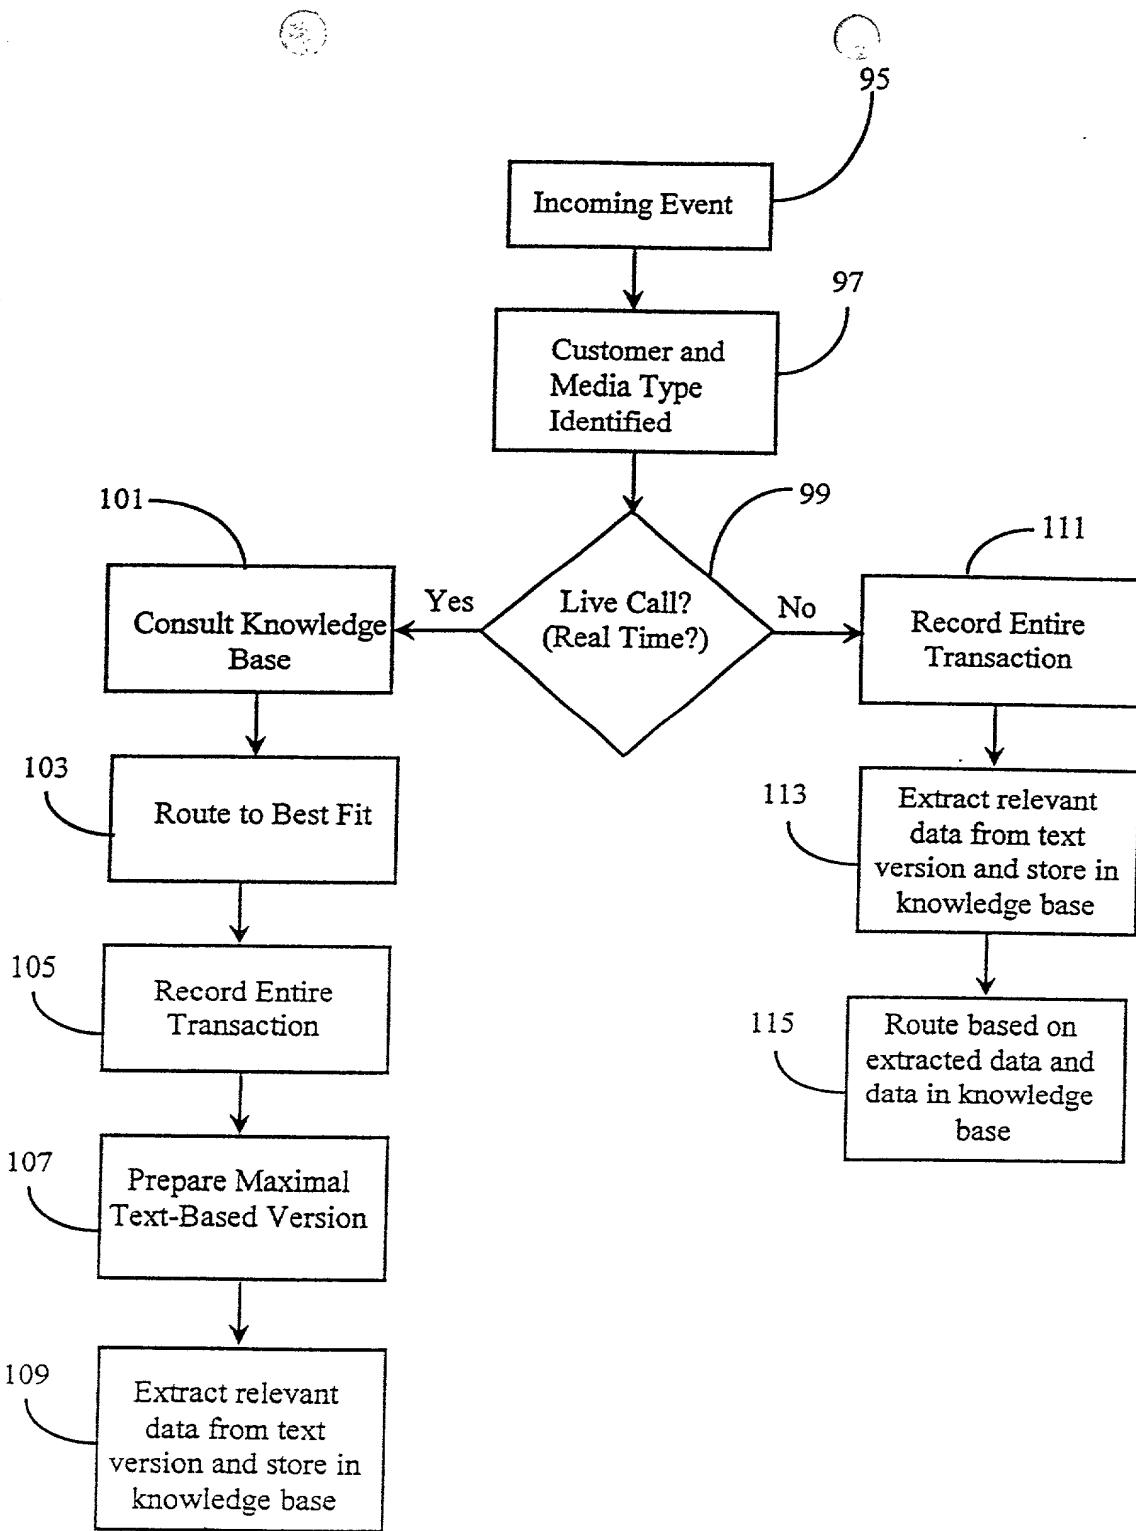


Fig. 3

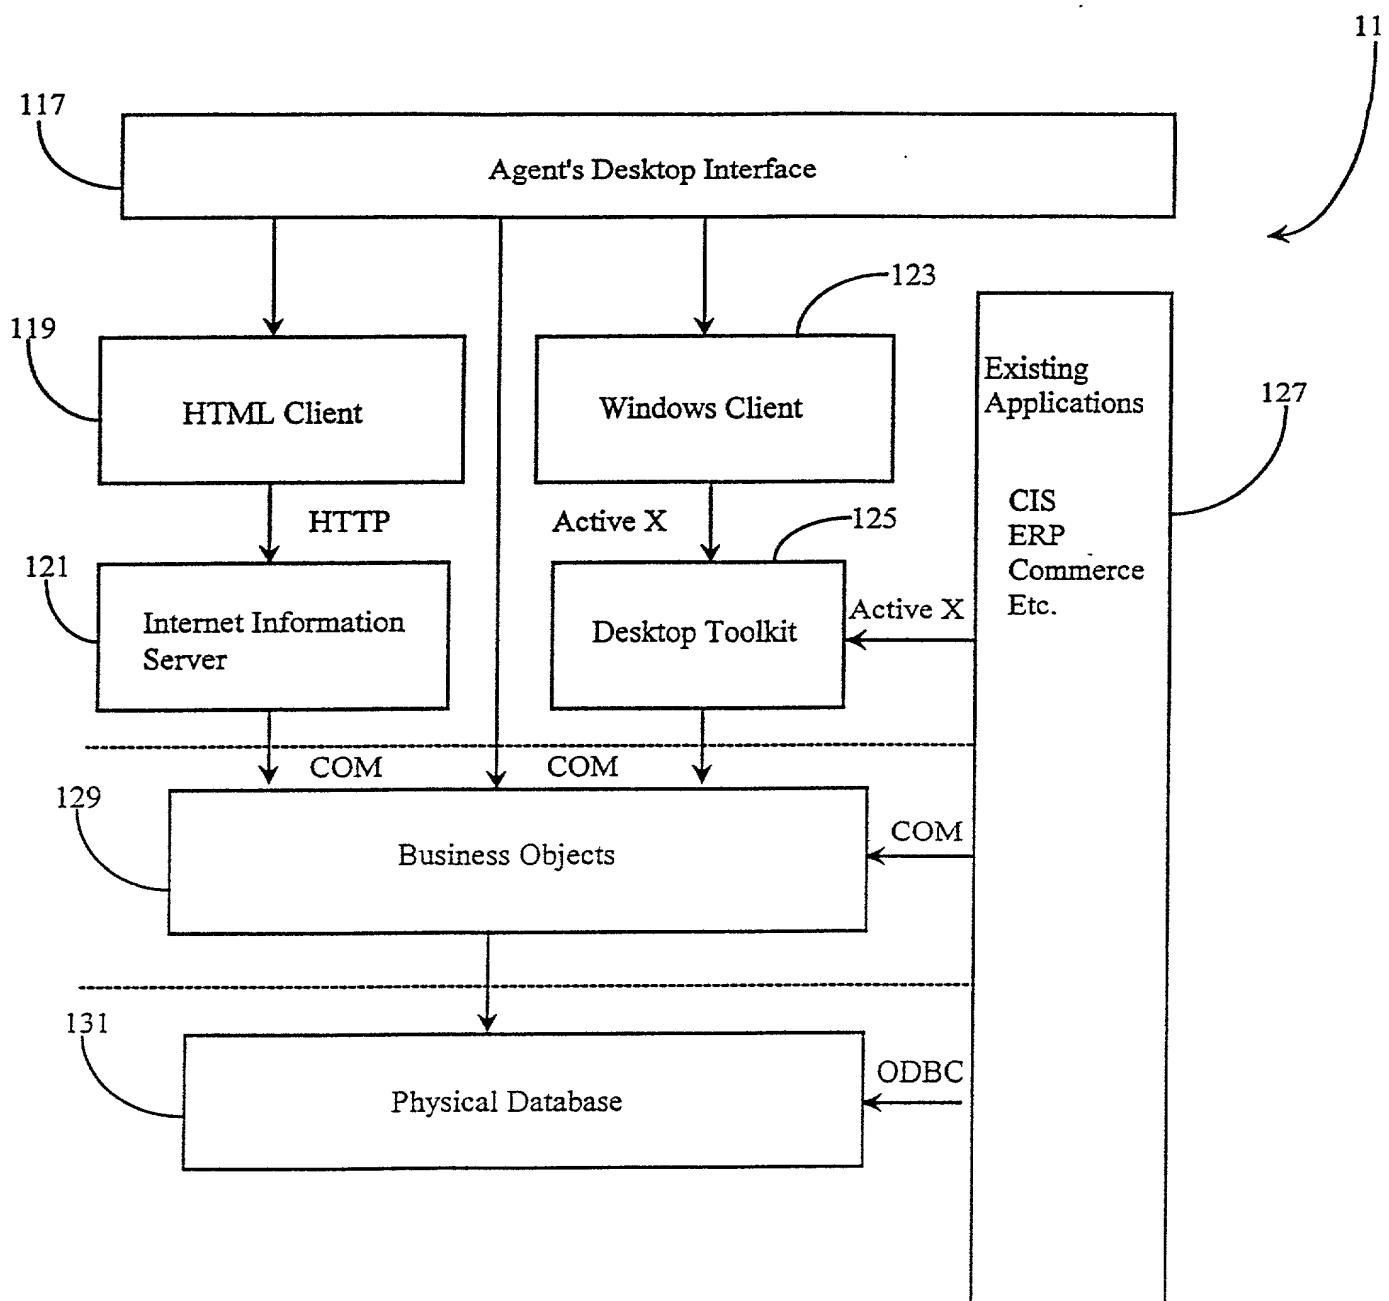


Fig. 4

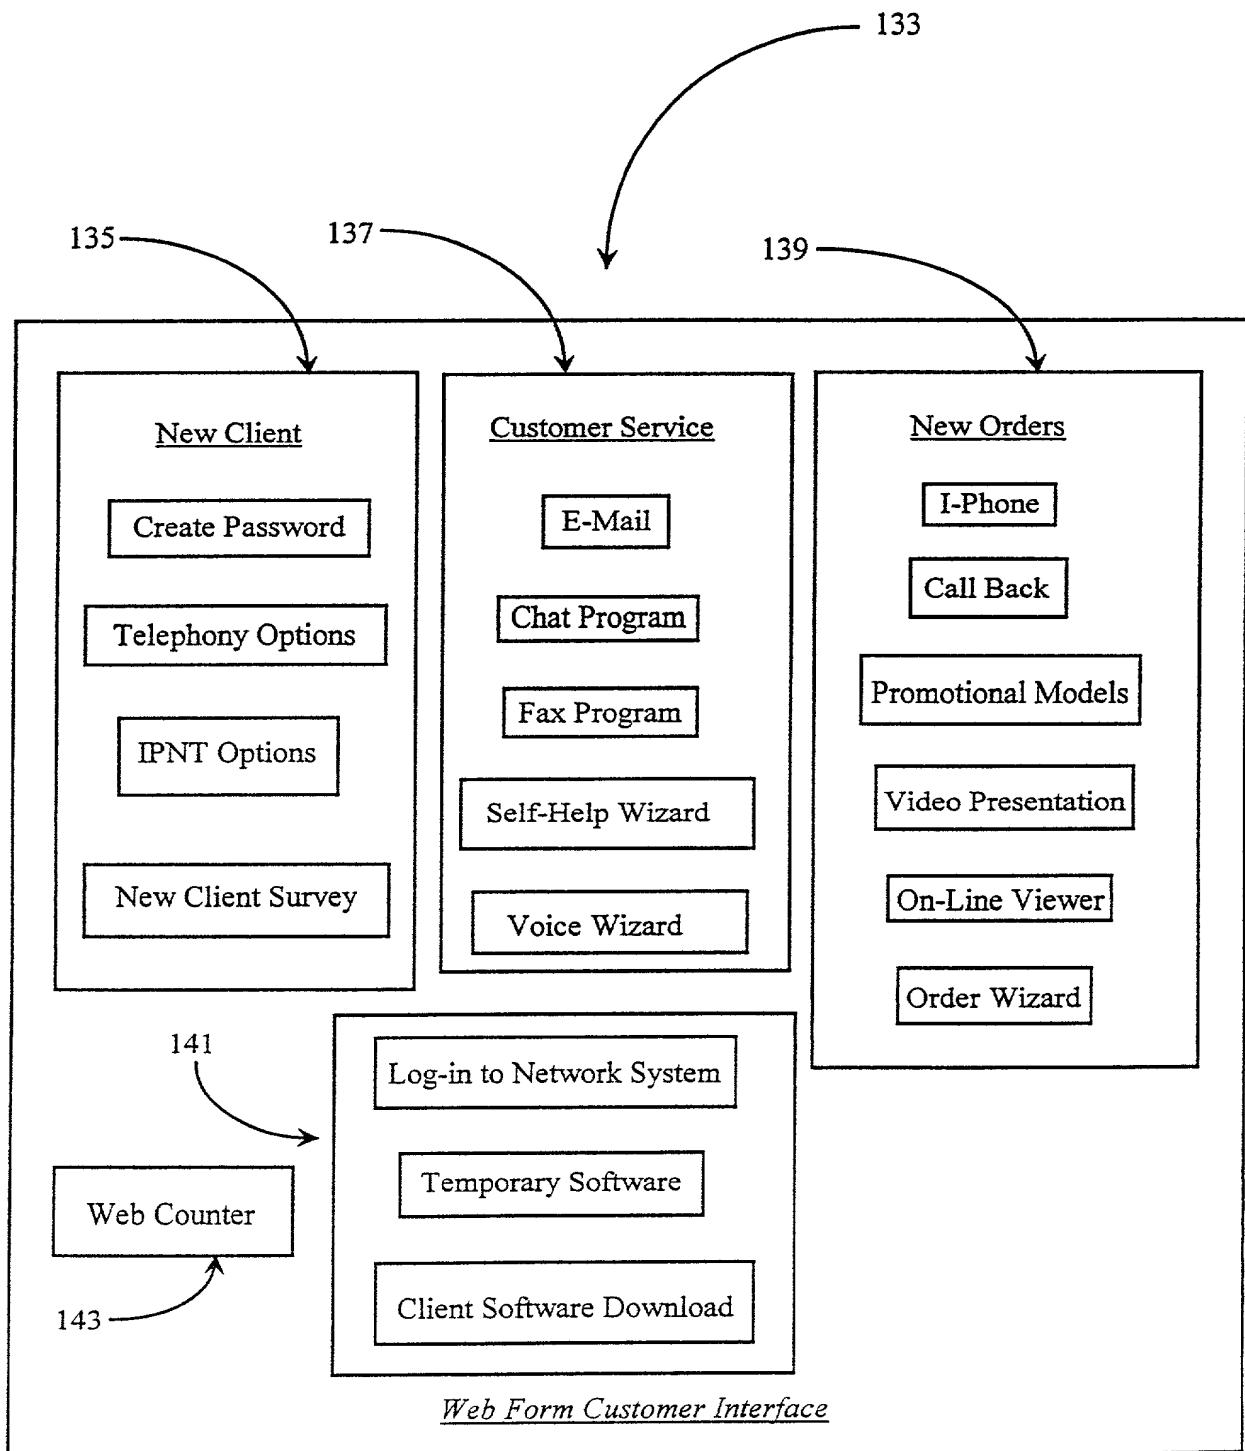


Fig. 5

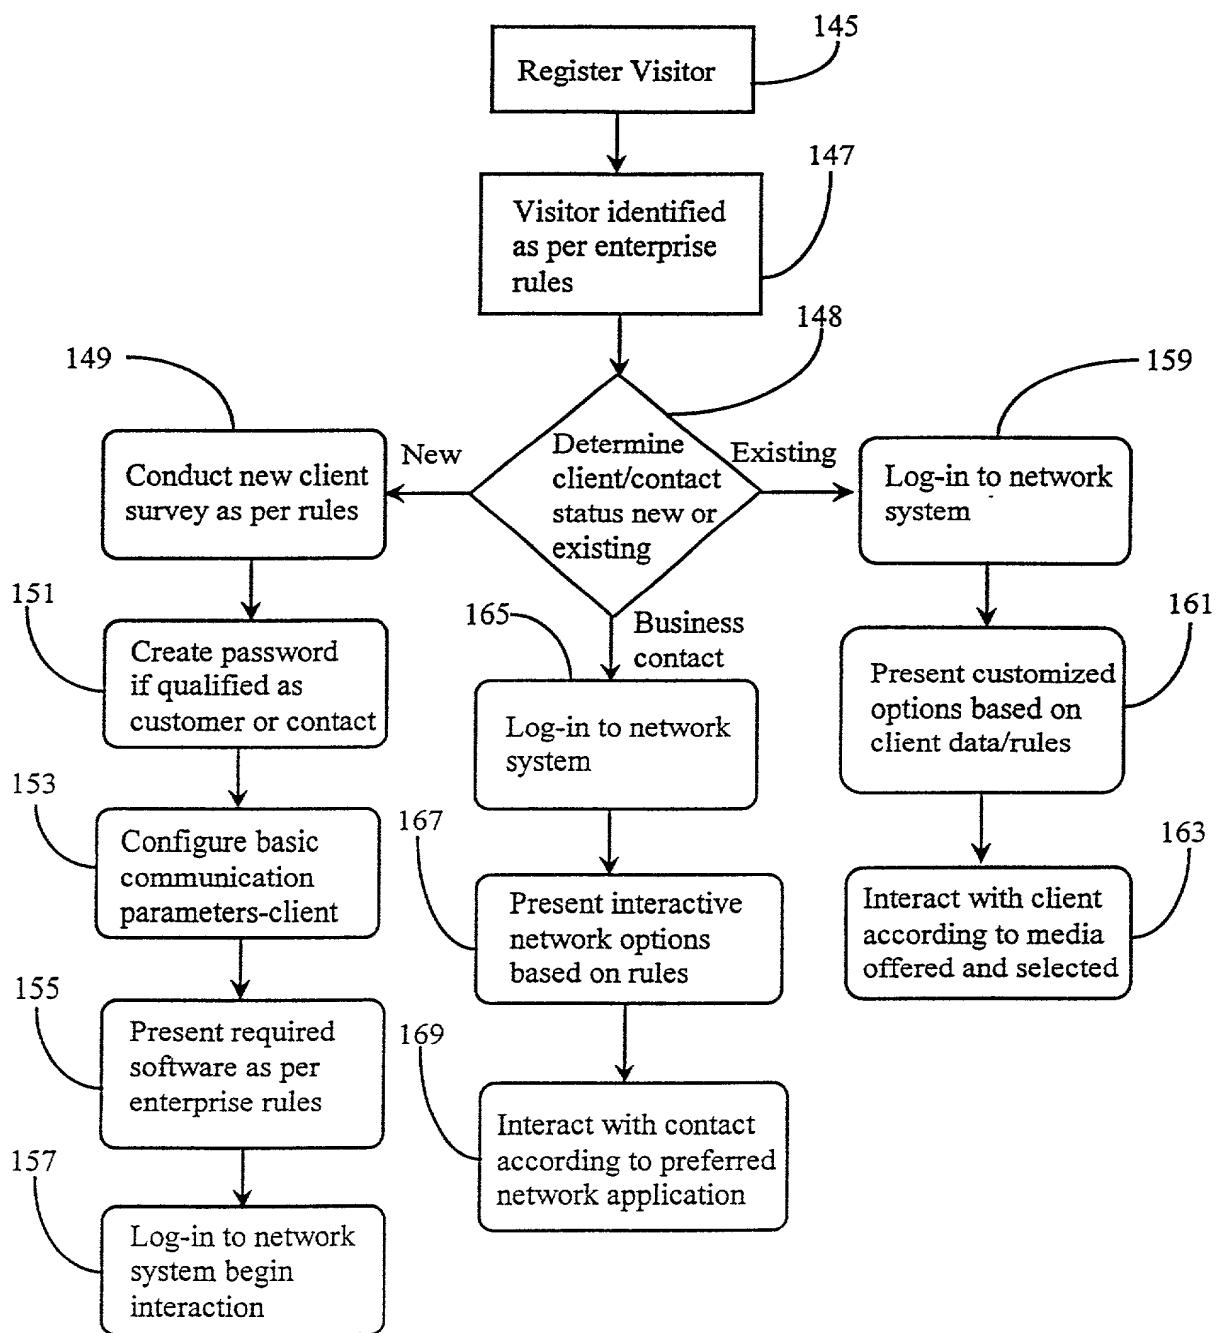


Fig. 6

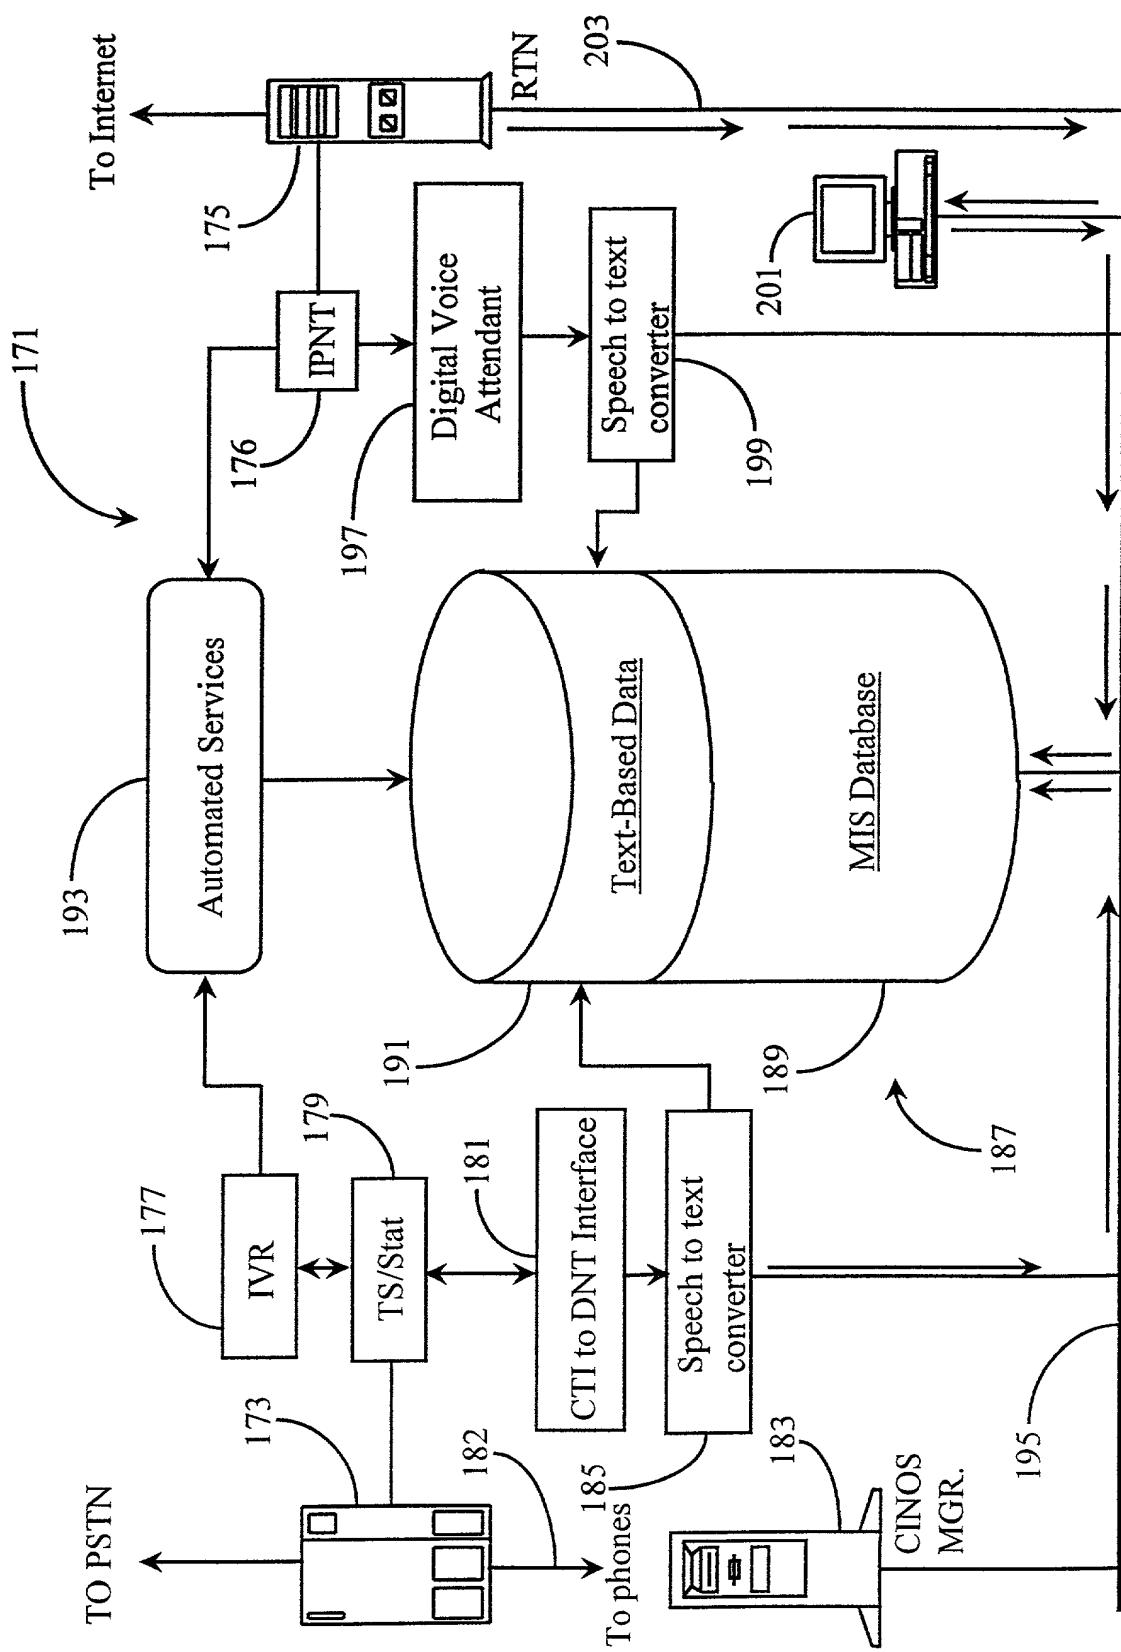


Fig. 7

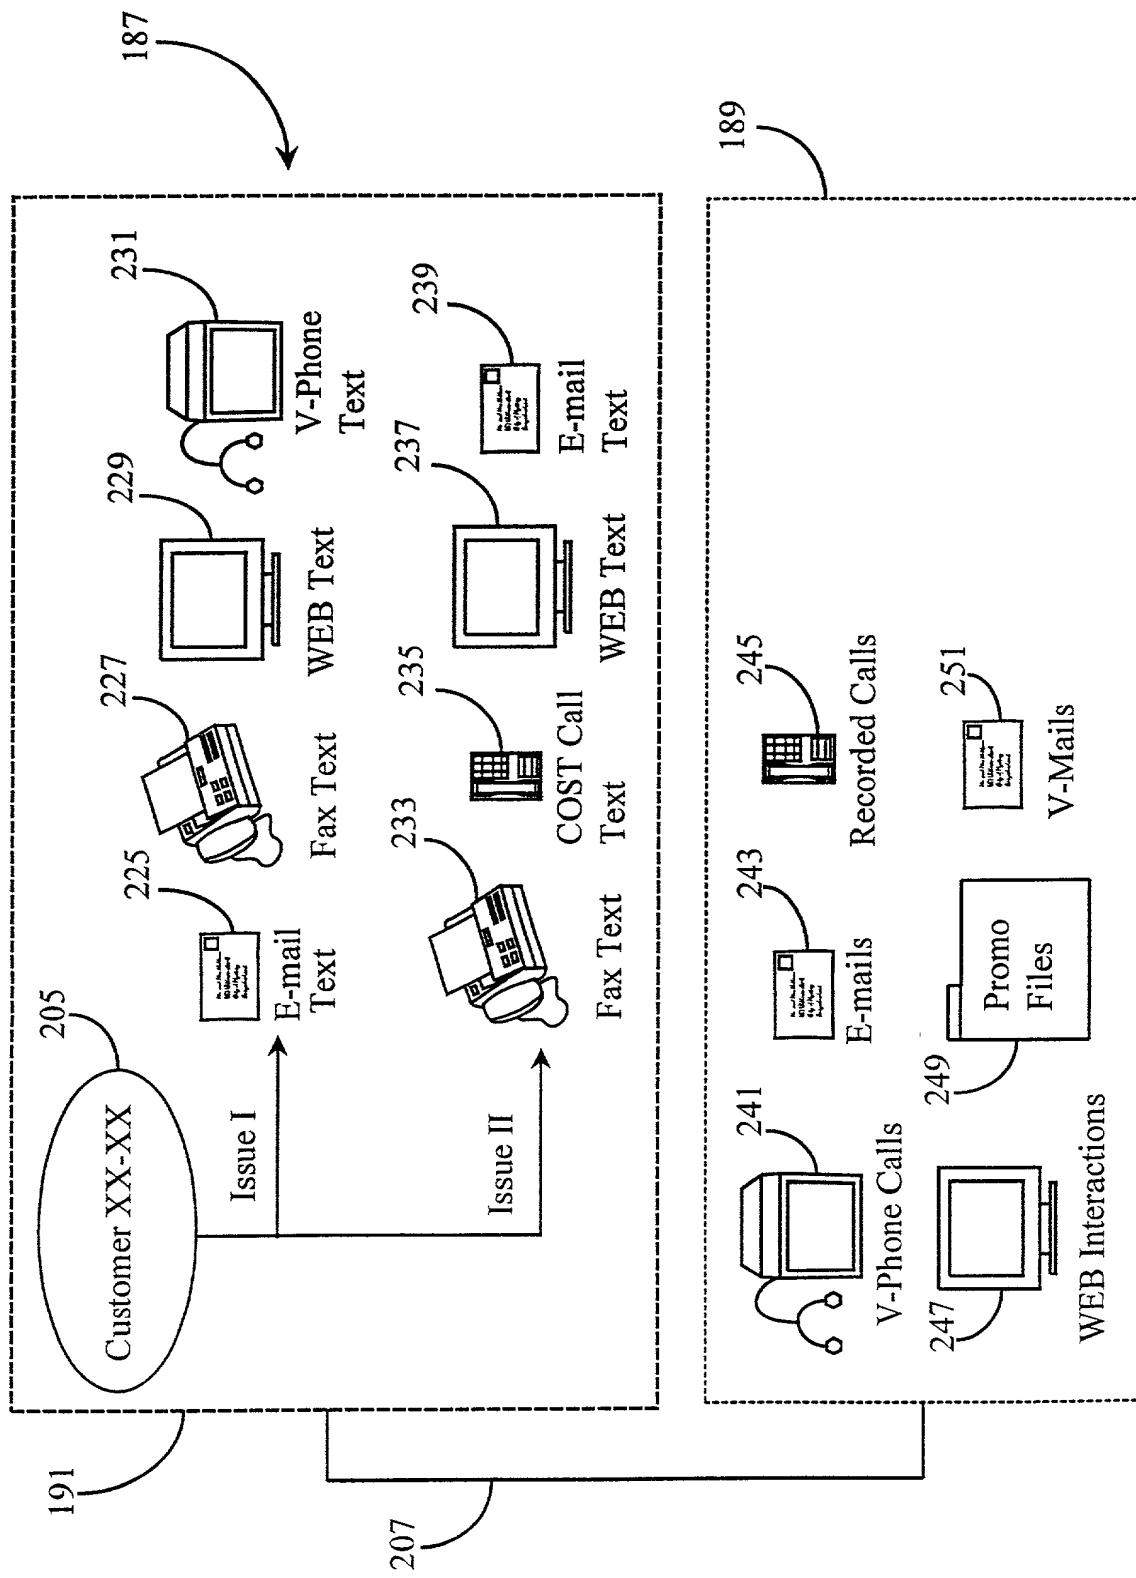


Fig. 8



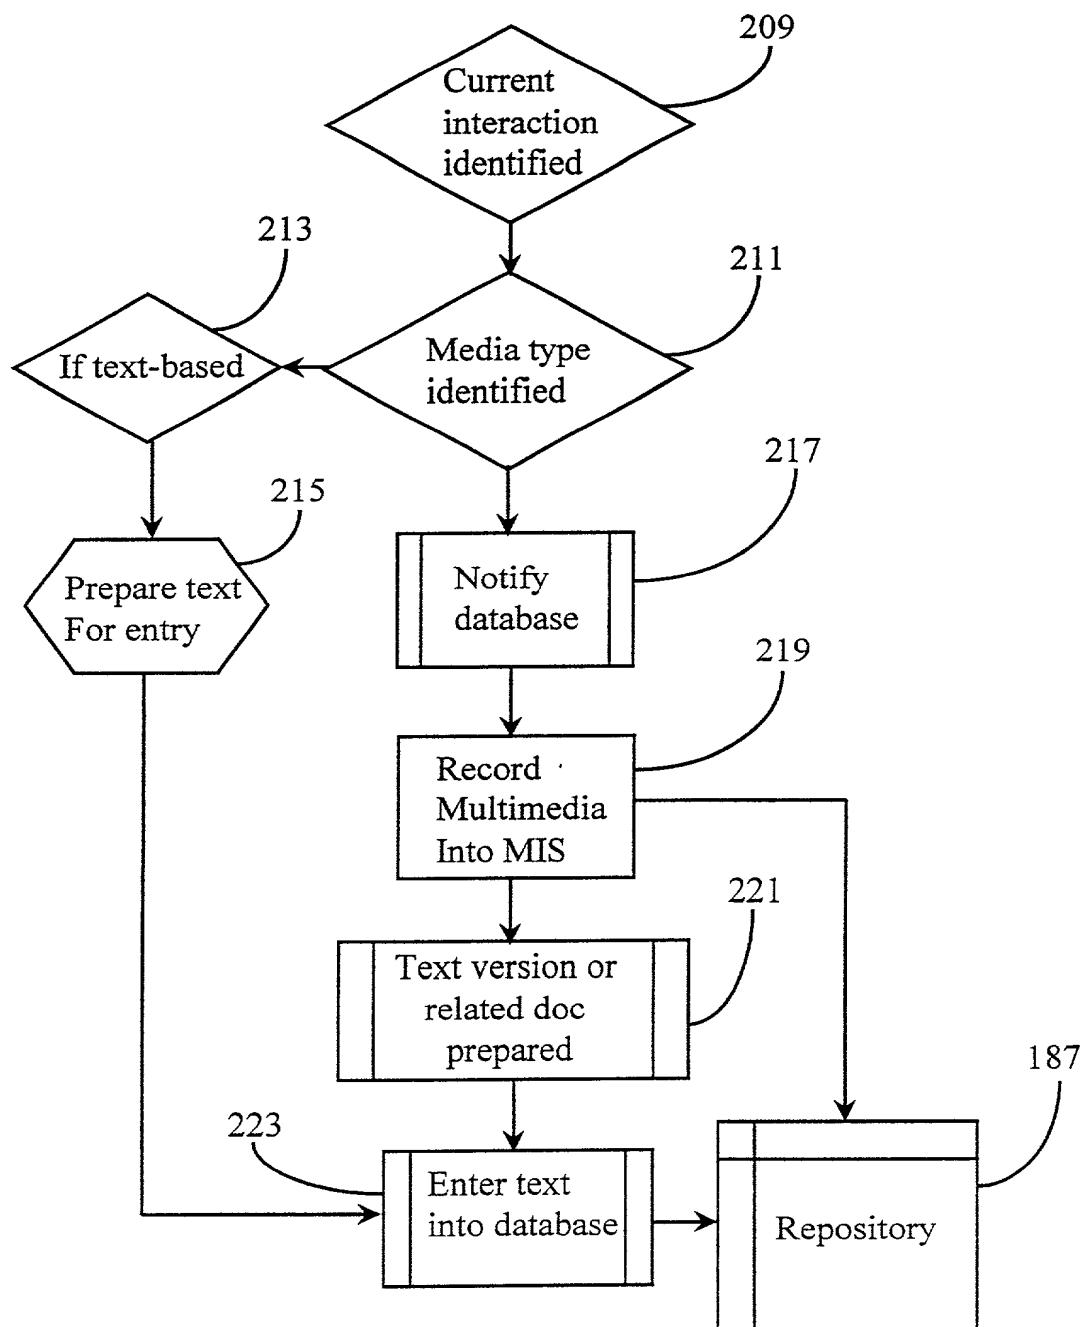


Fig. 9

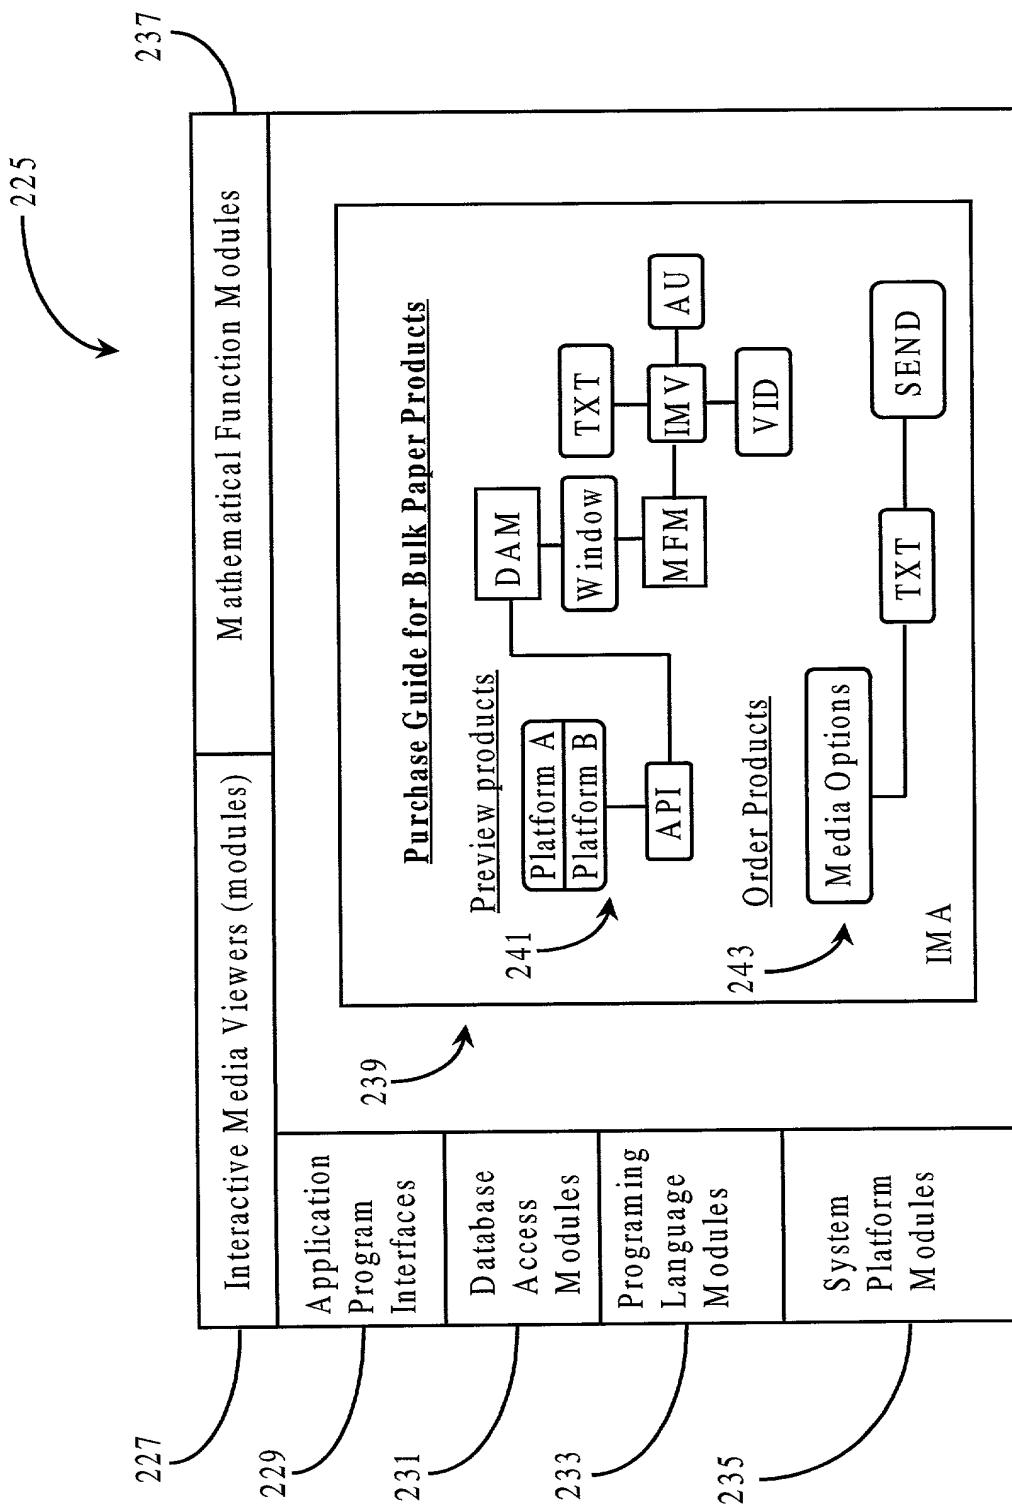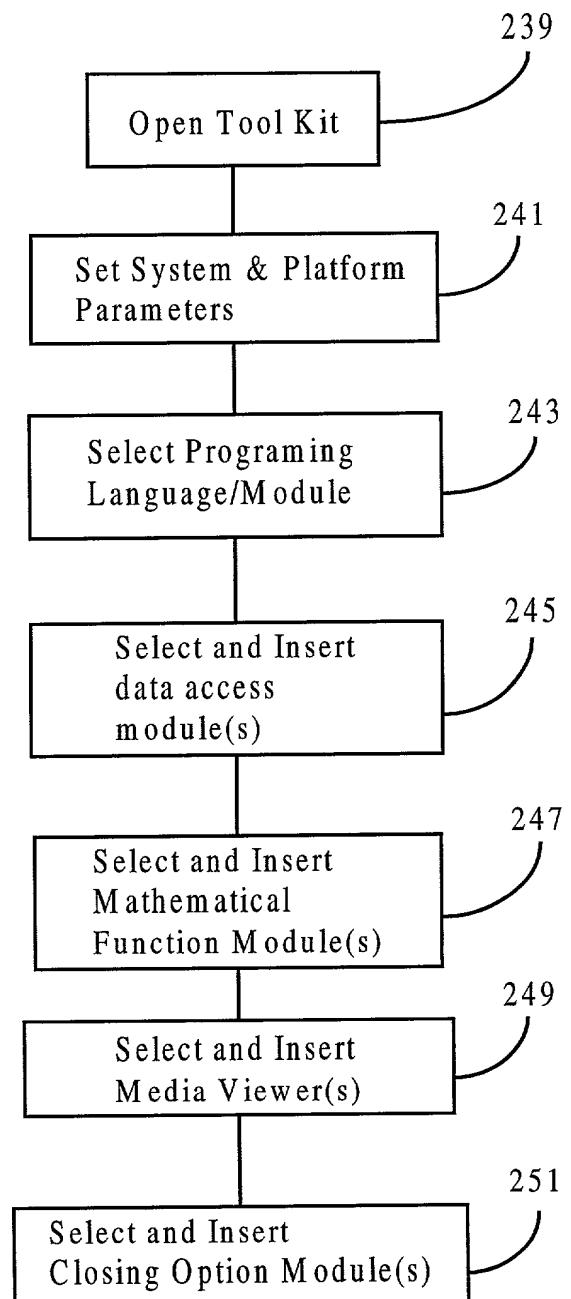

Customer/Agent/Associate IMA Tool Kit

Fig. 10



*Fig. 11*

**DECLARATION AND POWER OF ATTORNEY FOR PATENT  
APPLICATION**  
**ATTORNEY DOCKET NO.P3316**

As a below named inventor, I hereby declare that: My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **Method and Apparatus for Building Multimedia Applications Using Interactive Multimedia Viewers**

the specification of which (check one)  is attached hereto.

was filed on \_\_\_\_\_  
 Application Serial No. \_\_\_\_\_  
 and was amended on \_\_\_\_\_  
(If applicable)

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, s 1.56 (a). In the case that the present application is a continuation-in-part application, I further acknowledge the duty to disclose material information as defined in 37 CFR s 1.56(a) which became available between the filing date of the prior application and the filing date of the present application. I hereby claim foreign priority benefits under Title 35, United States Code s119 of any foreign applications for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

(Number)	(Country)	(Day/Month/Year Filed)
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, s120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, s112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, s156(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.): \_\_\_\_\_ (Filing Date): \_\_\_\_\_ (Status): \_\_\_\_\_  
(Application Serial No.): \_\_\_\_\_ (Filing Date): \_\_\_\_\_ (Status): \_\_\_\_\_  
(Application Serial No.): \_\_\_\_\_ (Filing Date): \_\_\_\_\_ (Status): \_\_\_\_\_  
(Application Serial No.): \_\_\_\_\_ (Filing Date): \_\_\_\_\_ (Status): \_\_\_\_\_  
(Application Serial No.): \_\_\_\_\_ (Filing Date): \_\_\_\_\_ (Status): \_\_\_\_\_

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.  
(List name and registration number)

Name:Donald R. Boys

Reg. No. 35,074

SEND CORRESPONDENCE TO:  
Donald R. Boys  
P.O. Box 187  
Aromas, CA 95004

DIRECT TELEPHONE CALLS TO:  
Donald R. Boys (831) 726-1457

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Christopher Clemmett Macleod Beck

1st inventor's signature: \_\_\_\_\_ Dated: \_\_\_\_\_  
Residence: 2043 S. Horne, Oceanside, CA. 92054 Citizenship: US  
Post Office Address: Same

Full name of 2nd joint inventor, if any: Jonathan Michael Berke

2nd inventor's signature: \_\_\_\_\_ Dated: \_\_\_\_\_  
Residence: 1359 Beryl Street, San Diego, CA. 92109 Citizenship: US  
Post Office Address: Same

Full name of 3rd joint inventor, if any: Joel A. Johnstone

3rd inventor's signature: \_\_\_\_\_ Dated: \_\_\_\_\_  
Residence: 5140 Georgetown Avenue, San Diego, CA. 92110 Citizenship: US  
Post Office Address: Same

Full name of 4th joint inventor, if any: Robin Marie Mitchell

4th inventor's signature: \_\_\_\_\_ Dated: \_\_\_\_\_  
Residence: 2041 Manchester Avenue, Cardiff, CA. 92007 Citizenship: US  
Post Office Address: Same

Full name of 5th joint inventor, if any: James Karl Powers

5th inventor's signature: \_\_\_\_\_ Dated: \_\_\_\_\_  
Residence: 4604 Trafalgar Lane, Carlsbad, CA. 92008 Citizenship: US  
Post Office Address: Same

Full name of 6th joint inventor, if any: Mark Franklin Sidell

6th inventor's signature: \_\_\_\_\_ Dated: \_\_\_\_\_  
Residence: 303 Country Club Road, Chapel Hill, NC. 27514 Citizenship: US  
Post Office Address: Same

Full name of 7th joint inventor, if any: \_\_\_\_\_

7th inventor's signature: \_\_\_\_\_ Dated: \_\_\_\_\_  
Residence: \_\_\_\_\_ Citizenship: \_\_\_\_\_  
Post Office Address: \_\_\_\_\_

Full name of 8th joint inventor, if any: \_\_\_\_\_

8th inventor's signature: \_\_\_\_\_ Dated: \_\_\_\_\_  
Residence: \_\_\_\_\_ Citizenship: \_\_\_\_\_  
Post Office Address: \_\_\_\_\_